
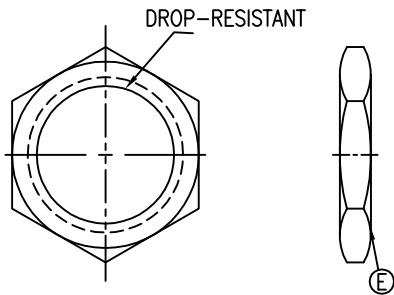



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T110628-5A	Harlen	2011.7.22
B	ECN NO:S120336	Harlen	2012.3.16

Recommend Panel Cut-out

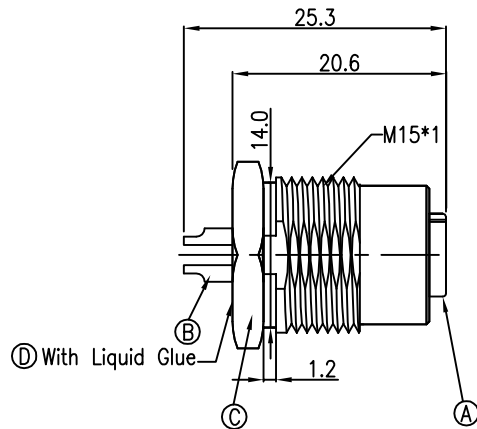

NOTES:

- ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +105°C(PANEL)
RATING: 60V AC/DC 5A
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- FOR PANEL THICKNESS MAX OF 3.5mm

E	NUT	1	BRASS DROP-RESISTANT	NICKEL PLATING 100u"
D	LIQUID GLUE	1		BLACK
C	SHIELD	1	BRASS	NICKEL PLATING 100u"
B	FEMALE PIN	4	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Sgconn Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司	
DECIMALS:		ANGLES:	TITLE M12 D-CODED SERIES FRONT MOUNT FEMALE CONN. (4PIN) HEXAGONAL BACKSHELL	
X	:±0.5	X	:±2°	DWN Harlen PART NO.2MT3D02-X04300H
X.X	:±0.3	X.X	:±1°	CHKD STEVE SCALE 2:1 UNIT: mm
X.XX	:±0.2			APVD TONY SIZE: A3 SHEET:1 OF 1 REV:B
CUSTOMER COPY				