


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T140925-8A	Bruce	2015.10.12
B	ECN NO:S160207-R	JIE-FU	2016.03.30
C	ECN NO:S160625-E	JIE-FU	2016.07.25

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - 1-1. RATING: 12V 1A
 - 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500 VDC.
- MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE : 0.3~3.0KGF.
 - 2-2. WITHDRAWAL FORCE : 0.3~3.0KGF.
- LIFE TEST: 5,000 CYCLES MIN.(NON-LOAD)
AFTER LIFE TEST, CONTACT RESISTANCE: 50mΩ MAX.
- PACKAGING : TAPE & REEL.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION MARK ON PRODUCT:
- HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON PACKAGING:
- FOR LEAD-FREE PROCESS.

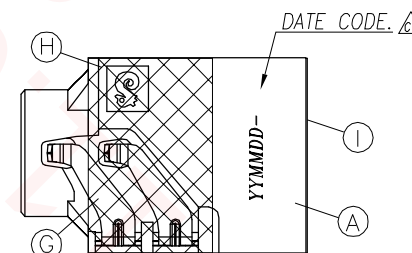

I	MYLAR	1	KAPTON	YELLOW
H	MYLAR	1	KAPTON	YELLOW
G	RING SPRING-B	2	C5210 0.2T	GOLD FLASH ON CONTACT AREA; GOLD FLASH ON SOLDER AREA; ALL OVER Ni 50u".
F	TRANSFER TERMINAL	1	C5210 0.2T	
E	BREAK TERMINAL	1	C2680 0.2T	
D	RING SPRING-A	1	C5210 0.2T	
C	TIP SPRING	1	C5210 0.25T	
B	SEPARATOR	1	PA10+30%GF Vicnyl R630NH BK UL 94V-0	BLACK
A	BODY	1	PA41+30%GF Ti1TX1-BK UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

DECIMALS:	ANGLES:	TITLE	3.5φ PHONE JACK		
X :±0.5	X :±2°	DWN	JIE-FU	PART NO.	2SJ3005-038211F
X.X :±0.3	X.X :±1°	CHKD	CERRY	SCALE:4/1	UNIT: mm
X.XX :±0.2		APVD	LUSSSEN	SIZE: A3	SHEET: 10F1

CUSTOMER COPY

