

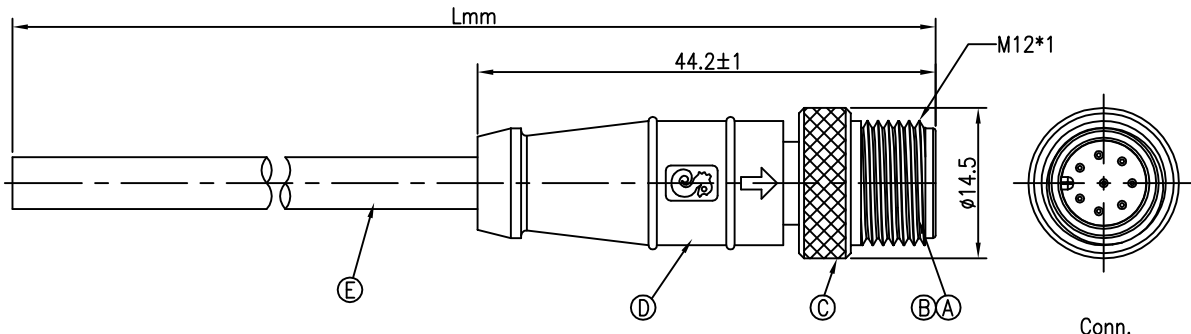


					REV. ECN NO OR DESCRIPTION REVISD DATE				
					A	PDR NO.:T09012013I~P		Steve	2009.06.08

2MT3012 -X03300		UL2464 22AWG*3C+A, PVC Jacket, UV Resistant OD=Ø5.0, Wire Color:1.Brown 3.Blue 4.Black	5A 60V AC/DC	IP67
2MT3012 -X04300		UL2464 22AWG*4C+A, PVC Jacket, UV Resistant OD=Ø5.0, Wire Color:1.Brown 2.White 3.Blue 4.Black	5A 60V AC/DC	IP67
2MT3012 -X05300		UL2464 22AWG*5C+A, PVC Jacket, UV Resistant OD=Ø5.5, Wire Color:1.Brown 2.White 3.Blue 4.Black 5.Green	5A 60V AC/DC	IP67
2MT3012 -X08200		UL2464 24AWG*8C+A, PVC Jacket, UV Resistant OD=Ø5.4, Wire Color:1.Black 2.Brown 3.Green 4.Yellow 5.Grey 6.White 7.Blue 8.Red	2A 60V AC/DC	IP67
2MT3022 -X03300		NOUL 22AWG*3C+A, Black FR-TPU Jacket,VW-1 OD=Ø5.0, Wire Color:1.Brown 3.Blue 4.Black	5A 60V AC/DC	IP68
2MT3022 -X04300		NOUL 22AWG*4C+A, Black FR-TPU Jacket,VW-1 OD=Ø5.0, Wire Color:1.Brown 2.White 3.Blue 4.Black	5A 60V AC/DC	IP68
2MT3022 -X05300		NOUL 22AWG*5C+A, Black FR-TPU Jacket,VW-1 OD=Ø5.5, Wire Color:1.Brown 2.White 3.Blue 4.Black 5.Green	5A 60V AC/DC	IP68
2MT3022 -X08200		NOUL 24AWG*8C+A, Black FR-TPU Jacket,VW-1 OD=Ø5.4, Wire Color:1.Black 2.Brown 3.Green 4.Yellow 5.Grey 6.White 7.Blue 8.Red	2A 60V AC/DC	IP68
P/N:	Pin Assignments Front View	Cable Spec.	Rating	Waterproof Rate

				
NOTES: 1. WATERPROOF RATE: IP67&IP68 IP67: IMMERSED IN 1M WATER FOR 30 MINUTES IP68: IMMERSED IN 1M WATER FOR 24 HOURS 2. CABLE LENGTH TOLERANCE: 1M~10M±5%mm, 11M~99M±500mm. 3. SPECIFICATIONS:SEE "M12 SERIES SPECIFICATIONS". 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC. 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS 6. ORDER INFORMATION: 2MT30X2-X0XX00 1- PVC JACKET CABLE 2- TPU JACKET CABLE 2-CURRENT RATING 2A 3-CURRENT RATING 5A 3- 3 PIN 4- 4 PIN 5- 5 PIN 8- 8 PIN				

E	CABLE	1	SEE NOTE 7	BLACK
D	OVER MOLD	1	TPU	BLACK
C	SCREW NUT	1	BRASS	NICKEL PLATING 100u"
B	MALE PIN	*	BRASS	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
 Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE	M12 SERIES 180°(3~8)PIN MALE CONN.			
DWN	Steve	PART NO.2MT30X2-X0XX00		
CHKD	Quan	SCALE 2:1	UNIT: mm	
APVD	Lussen	SIZE: A3	SHEET:1 OF 1	REV: A
CUSTOMER COPY				

文件編號 RD-06-043-A