
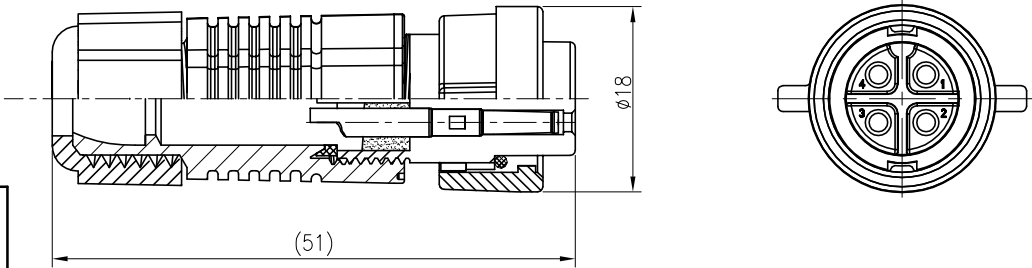


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T101109-3A~6A	Glen	2011.08.03

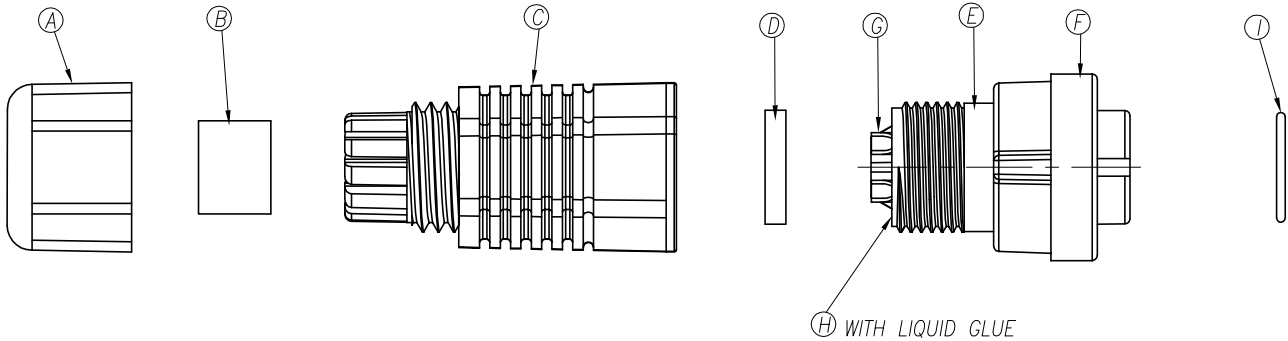

C	2CT3032-X024A0		10A	18AWG~20AWG *2C
	2CT3032-X034A0		10A	18AWG~20AWG *3C
B	2CT3032-X044A0		10A	18AWG~20AWG *4C
	2CT3032-X053A0		5A	22AWG~24AWG *5C
A	P/N:	Pin Assignments Front View	Current Rating	Recommended Cable AWG

- NOTES:
1. WATERPROOF RATE: IP68
IP68: IMMERSED IN 1M WATER FOR 24 HOURS
 2. SEAL FOR CABLE OD:Ø4.5mm~Ø7.0mm
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING.

G.P. PASS

I	O-RING	1	EPDM	BLACK
H	LIQUID GLUE	1	N/A	BLACK
G	FEMALE PIN	*	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
F	LOCK NUT	1	NYLON+33%GF	BLACK
E	BODY	1	NYLON+33%GF	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PPE	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PPE	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		SGconn Singatron Electronic(China) Co., Ltd. Waterproof Connectors 信音電子(中國)股份有限公司		
DECIMALS: ANGLES:		TITLE CIRCULAR STANDARD SIZE (IP68) FEMALE CONN. FEMALE (2~5)PIN ASSEMBLY TYPE		
X	:±0.5	X	:±2°	DWN Glen PART NO.2CT3032-X0XXA0
X.X	:±0.3	X.X	:±1°	CHKD Shawn SCALE 2:1 UNIT: mm
X.XX	:±0.2	APVD	Tony	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				