


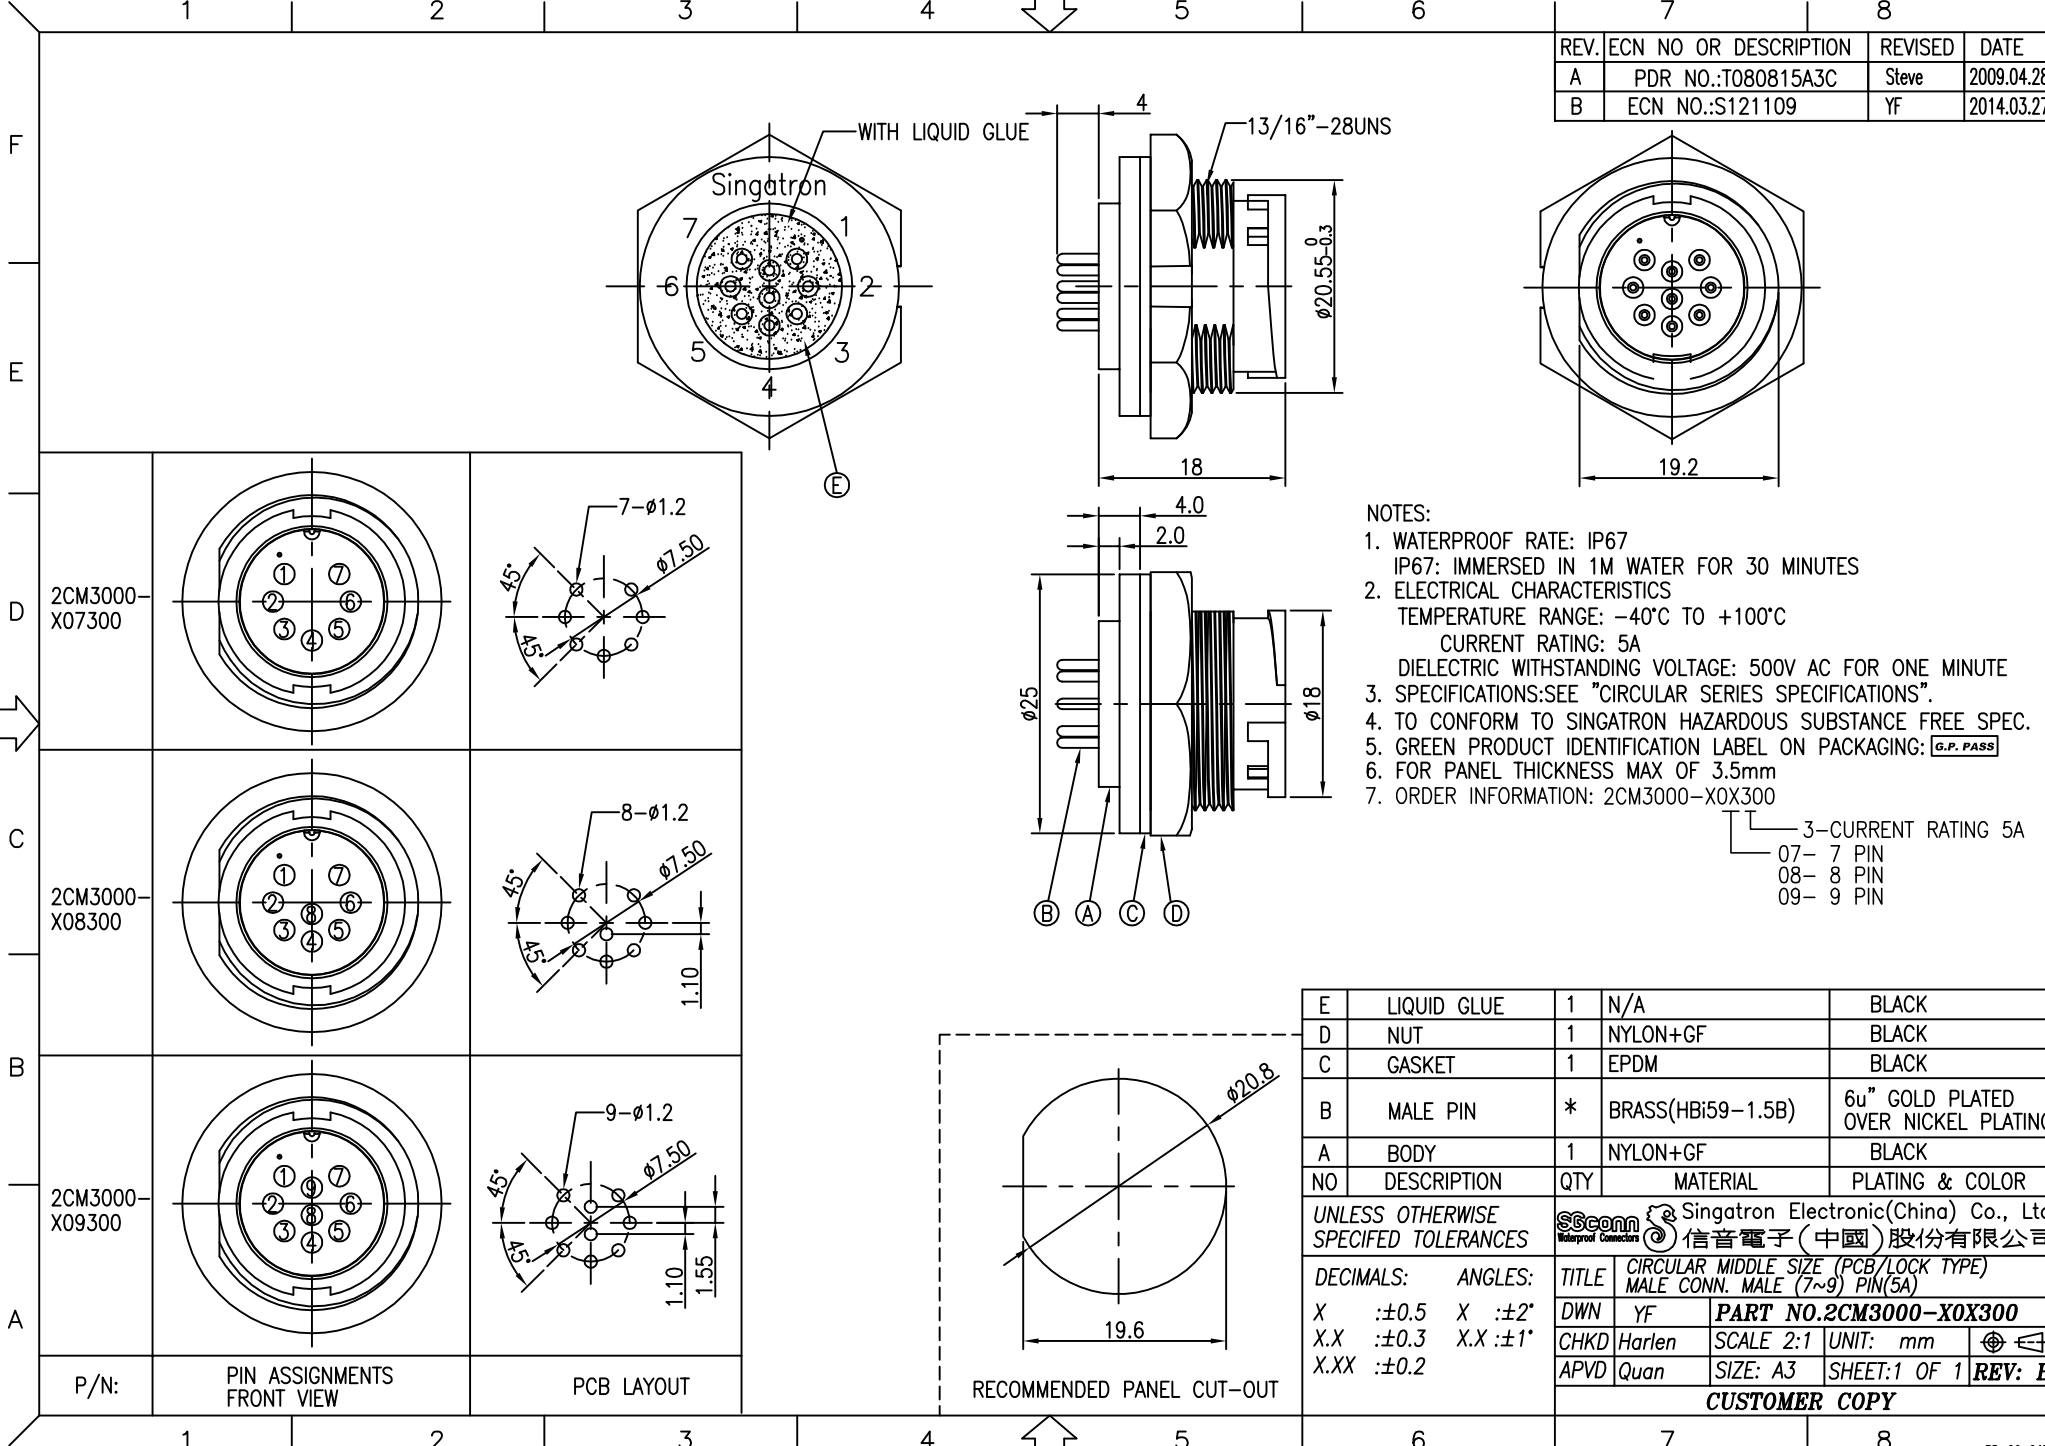

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T080815A3C	Steve	2009.04.28
B	ECN NO.:S121109	YF	2014.03.27

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 5A
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
 6. FOR PANEL THICKNESS MAX OF 3.5mm
 7. ORDER INFORMATION: 2CM3000-X0X300

- 3-CURRENT RATING 5A
07- 7 PIN
08- 8 PIN
09- 9 PIN

E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GASKET	1	EPDM	BLACK
B	MALE PIN	*	BRASS(HBI59-1.5B)	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
SINGATRON Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司				
TITLE CIRCULAR MIDDLE SIZE (PCB/LOCK TYPE) MALE CONN. MALE (7~9) PIN(5A)				
DWN	YF	PART NO.2CM3000-X0X300		
CHKD	Harlen	SCALE 2:1	UNIT: mm	
APVD	Quan	SIZE: A3	SHEET:1 OF 1	REV: B
CUSTOMER COPY				