







REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T080815A3D	Steve	2009.04.28
B	ECN NO.:S121109	YF	2014.03.27

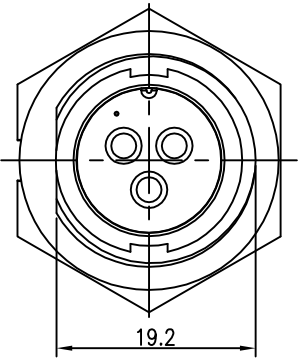

PIN ASSIGNMENTS
FRONT VIEW

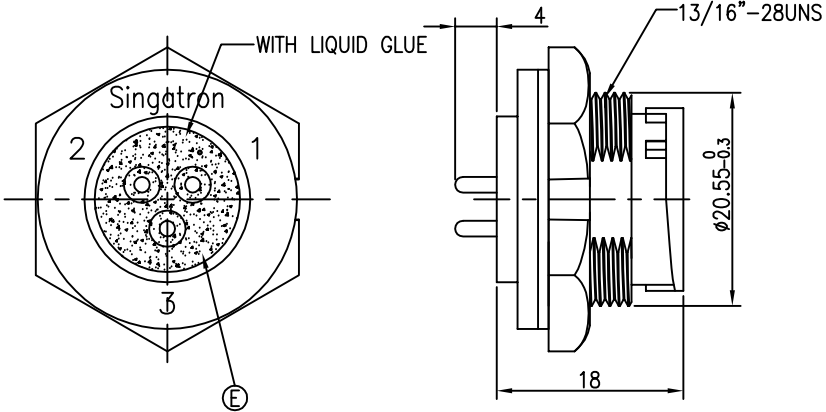

RECOMMENDED PANEL CUT-OUT

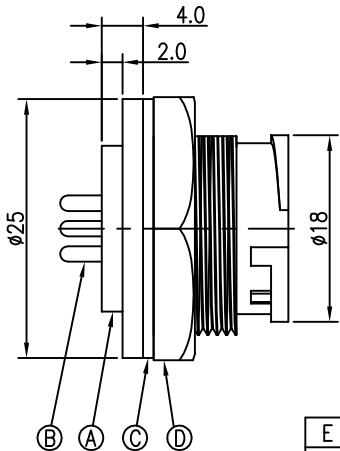

3 PIN MALE CONNECTOR
MALE PIN PCB LAYOUT

- NOTES:
1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -40°C TO +100°C
CURRENT RATING: 16A
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC FOR ONE MINUTE
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
 6. FOR PANEL THICKNESS MAX OF 3.5mm

E	LIQUID GLUE	1	N/A	BLACK
D	NUT	1	NYLON+GF	BLACK
C	GASKET	1	EPDM	BLACK
B	MALE PIN	3	BRASS	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			 Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司	
DECIMALS:		ANGLES:	TITLE CIRCULAR MIDDLE SIZE (PCB/LOCK TYPE) MALE CONN. MALE 3 PIN(16A)	
X	:±0.5	X	:±2°	DWN YF PART NO.2CM3000-X03600
X.X	:±0.3	X.X	:±1°	CHKD Harlen SCALE 2:1 UNIT: mm
X.XX	:±0.2			APVD Quan SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				