





	1	2	3	4	5	6	7	8
F	2CT3010-X02400		UL2464 20AWG*2C+Al/My, (UV Resistant),OD=Ø4.7, Wire Color: 1.Green 2.Red	10A				
E	2CT3010-X03400		UL2464 20AWG*3C+Al/My (UV Resistant),OD=Ø5.0, Wire Color: 1.Black 2.White 3.Yellow	10A				
	2CT3010-X04400		UL2464 20AWG*4C+Al/My (UV Resistant),OD=Ø5.3, Wire Color: 1.Brown 2.Blue 3.Blackd 4.White	10A				
	2CT3010-X04300		UL2464 24AWG*4C+Al/My (UV Resistant),OD=Ø4.4, Wire Color: 1.White 2.Green 3.Red 4.Yellow	5A				
D	2CT3010-X05300		UL2464 24AWG*5C+Al/My (UV Resistant),OD=Ø4.7, Wire Color: 1.Brown 2.Blue 3.Black 4.White 5.Red	5A				
	2CT3010-X06300		UL2464 24AWG*6C+Al/My (UV Resistant),OD=Ø5.0, Wire Color: 1.Blue 2.Green 3.Yellow 4.Black 5.Red 6.White	5A				
C	2CT3010-X07300		UL2464 24AWG*7C+Al/My (UV Resistant),OD=Ø5.0, Wire Color: 1.Blue 2.Black 3.Yellow 4.Red 5.Brown 6.Green 7.White	5A				
B	2CT3010-X08300		UL2464 24AWG*8C+Al/My (UV Resistant),OD=Ø5.4, Wire Color: 1.Black 2.Brown 3.White 4.Blue 5.Red 6.Grey 7.Yellow 8.Green	5A				
	2CT3010-X10200		UL2464 26AWG*10C+Al/My (UV Resistant),OD=Ø5.7, Wire Color: 1.Brown 2.Blue 3.White 4.Green 5.Yellow 6.Grey 7.Pink 8.Red 9.Black 10.Orange	2A				
A	2CT3010-X12200		UL2464 26AWG*12C+Al/My (UV Resistant),OD=Ø5.9, Wire Color: 1.Brown 2.Blue 3.White 4.Green 5.Yellow 6.Grey 7.Pink 8.Red 9.Black 10.Orange 11.Purple 12.Light Green	2A				
	P/N:	Pin Assignments Front View	Cable Spec.	Current Rating				

NOTES:

- WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
- CABLE LENGTH TOLERANCE: 1M~10M±5%mm,
11M~99M±500mm.
CABLE JACKET MATERIAL: BLACK PVC
- SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
- ORDER INFORMATION:
2CT3010-XXXX00

- 2-CURRENT RATING 2A
3-CURRENT RATING 5A
4-CURRENT RATING 10A

- 02- 2 PIN
03- 3 PIN
04- 4 PIN
05- 5 PIN
06- 6 PIN
07- 7 PIN
08- 8 PIN
10-10 PIN
12-12 PIN

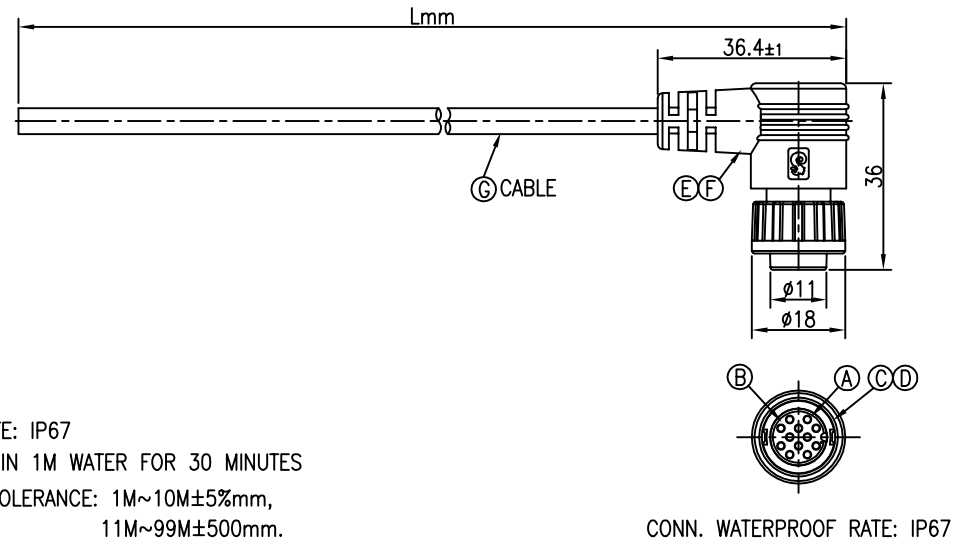

F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	*	Phosphor Bronze Alloy	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatronic Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司		
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR STANDARD SIZE (90° IP67)
X.X	:±0.3	X.X	:±1°	FEMALE CONN. FEMALE (2~12)PIN/LOCK TYPE
X.XX	:±0.2			
DWN	Steve	PART NO.2CT3010-XXXX00		
CHKD	Quan	SCALE 1:1	UNIT: mm	
APVD	Max	SIZE: A3	SHEET:1 OF 1	REV: A
CUSTOMER COPY				