


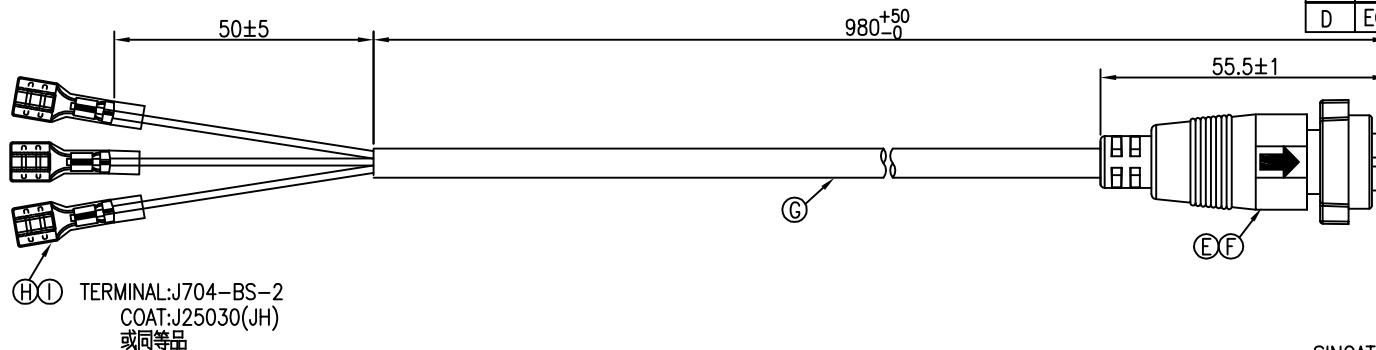


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T090625-1A	HARLEN	2010.03.22
B	ECN NO:S110707	HARLEN	2011.8.2
C	ECN NO:S120462	HARLEN	2012.5.2
D	ECN NO:S121021	HARLEN	2012.10.19

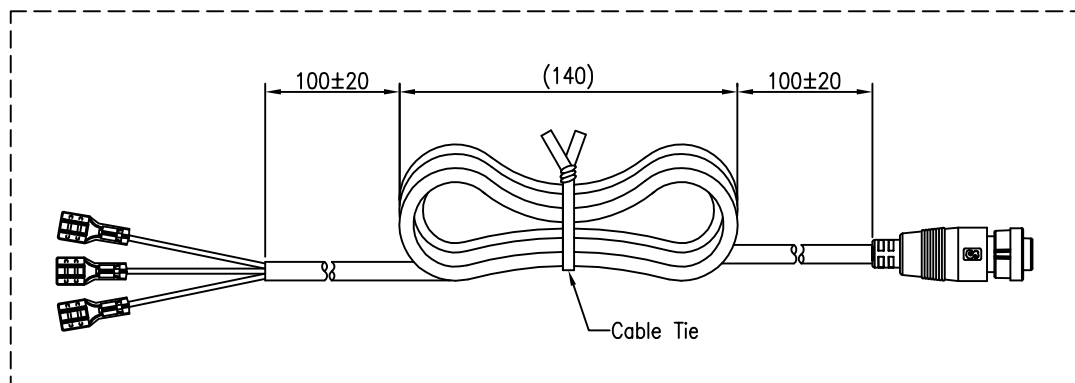

CONN. WATERPROOF RATE: IP55

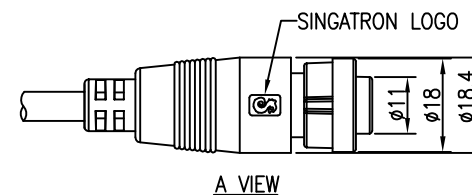

I	COAT	3	PVC	NATURAL
H	TERMINAL	3	BRASS	TINNED PLATING
G	CABLE	1	UL2464 18AWG*3C+ Al/My(UV RESISTANT) OD5.6	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	BLACK
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF	BLACK
B	MALE PIN	3	HBi59-1.5B	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES

Singatron Electronic(China) Co., Ltd.
信音電子(中國)股份有限公司


DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

TITLE CIRCULAR STANDARD SIZE (LOCK TYPE)
FEMALE CONN. MALE 3 PIN(10A)
DWN Harlen PART NO.2CT3016-X03402
CHKD Shawn SCALE 1:1 UNIT: mm
APVD Steve SIZE: A3 SHEET:1 OF 1 REV:D

CUSTOMER COPY

YELLOW	3
BLACK	2
WHITE	1
WIRE COLOR	CONN.

PIN OUT



NOTES:

1. WATERPROOF RATE: IP55
2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
CURRENT RATING: 10A
3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS