
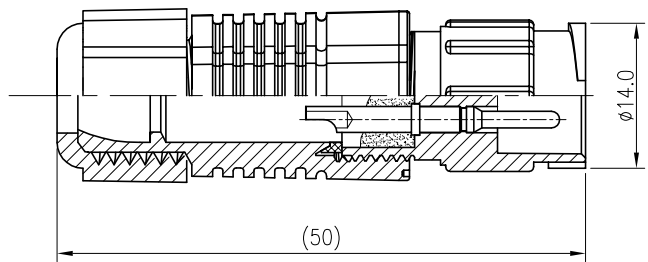


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T101109-3B~6B	Glen	2011.08.03

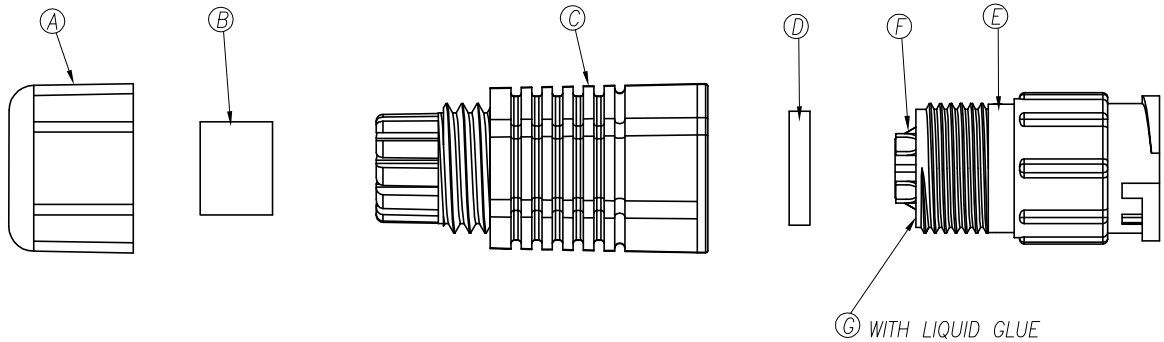

2CT3033-X024A0		10A	18AWG~20AWG *2C
2CT3033-X034A0		10A	18AWG~20AWG *3C
2CT3033-X044A0		10A	18AWG~20AWG *4C
2CT3033-X053A0		5A	22AWG~24AWG *5C
P/N:	Pin Assignments Front View	Current Rating	Recommended Cable AWG

NOTES:

1. WATERPROOF RATE: IP68
IP68: IMMERSED IN 1M WATER FOR 24 HOURS
2. SEAL FOR CABLE OD:Ø4.5mm~Ø7.0mm
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

G	LIQUID GLUE	1	N/A	BLACK
F	MALE PIN	*	BRASS	1~3u" GOLD PLATING OVER NICKEL PLATING
E	BODY	1	NYLON+33%GF	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PPE	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PPE	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Sgcomm 信音電子 (中國) 股份有限公司 Waterproof Connectors Singatron Electronic(China) Co., Ltd.		
DECIMALS: ANGLES:		TITLE CIRCULAR STANDARD SIZE (IP68) MALE CONN. MALE (2~5)PIN ASSEMBLY TYPE		
X :±0.5	X :±2°	DWN	Glen	PART NO.2CT3033-XXXXA0
X.X :±0.3	X.X :±1°	CHKD	Shawn	SCALE 2:1 UNIT: mm
X.XX :±0.2		APVD	Tony	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				