

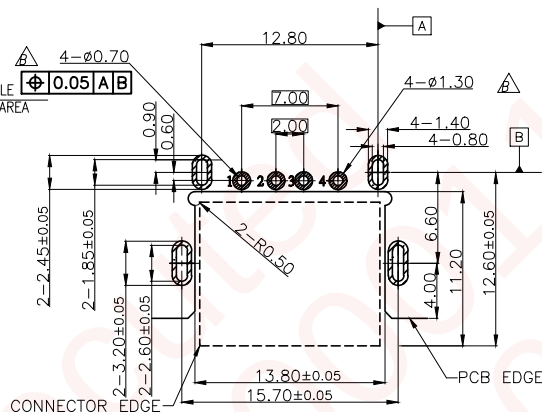
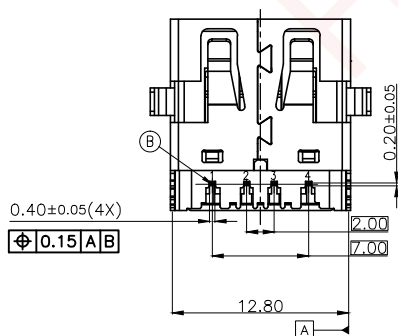
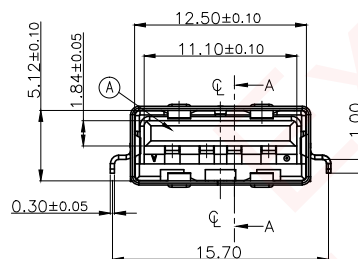



DATE CODE (C) $\phi 4.0\text{mm}$ AVAILABLE
VACUUM PICK UP AREA




Recommended P.C.B Layout(TOP VIEW)
(THK: 1.0mm) TOLERANCE=±0.03

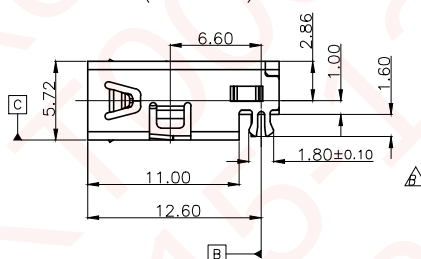

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30M Ω maximum when measured at 20MV maximum open circuit at 100mA
 - DIELECTRIC WITHSTANDING VOLTAGE: The dielectric must withstand 500V AC Max With 1 Minute
 - INSULATION RESISTANCE: 1000M Ω minimum
 - CURRENT RATING: 1.5A at 250V AC minimum when measured at an ambient temperature of 25° C
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 3.5 Kgf MAX
 - WITHDRAWAL FORCE : 1.0 Kgf MIN
 - DURABILITY: 5,000 CYCLES.
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN PRODUCT IDENTIFICATION MARK IN JACK:
- HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- FOR WAVE SOLDERING LEAD-FREE PROCESS.
- DATE : YYMMDD
- PACKAGING : TAPE & REEL.



3D VIEW

REMARK	Pin Number	Signal ASSIGNMENT
USB2.0 CONTACT PIN	PIN 1	VBUS
	PIN 2	D-
	PIN 3	D+
	PIN 4	GND

C	SHELL	1	SUS340 1/2H, T=0.30	NICKEL 60uIN MIN
B	4 PIN TERMINAL	4	C5210-EH ,T=0.20	GOLD FLASH ON CONTACT AREA, 100u"(Min.)MATTE SN PLATED ON SOLDERING 60u"(Min.)NICKEL UNDER PLATING OVERALL.
A	BODY	1	PA4T+30%GF,UL94-V0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信音企業股份有限公司				
DECIMALS:	ANGLES:	TITLE		
X :±0.5	X :±2°	DWN	PENG	USB 2.0 CONN.
X.X :±0.3	X.X :±1°	CHKD	JAMES	PART NO:2UB3907-008111F
X.XX :±0.2		APVD	BOYE	SCALE:4:1 UNIT: mm
SIZE: A3 SHEET:1 OF 1 REV: B				
CUSTOMER COPY				