
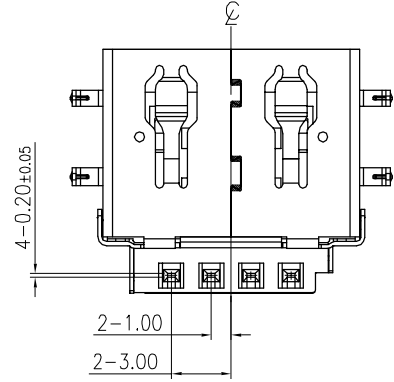
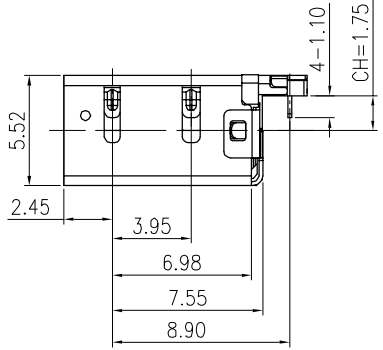
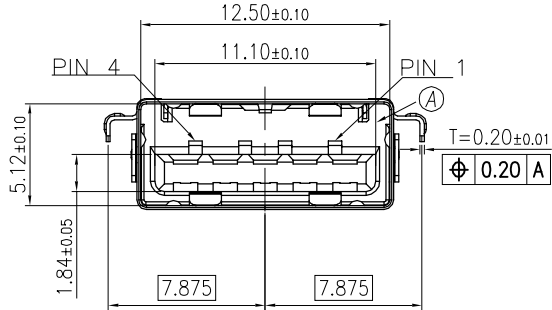
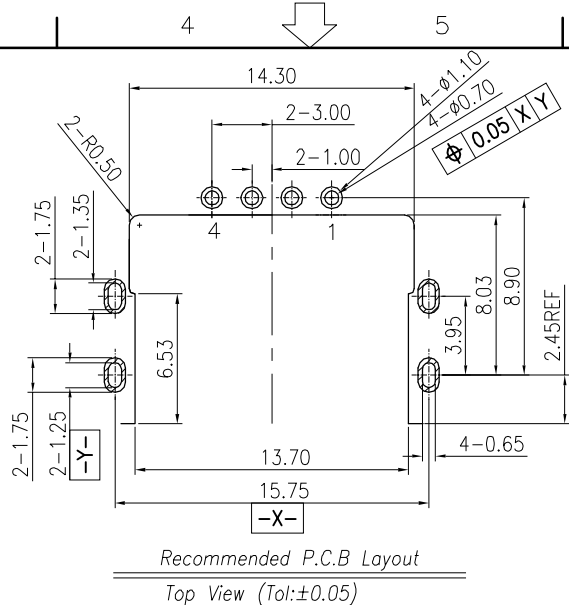
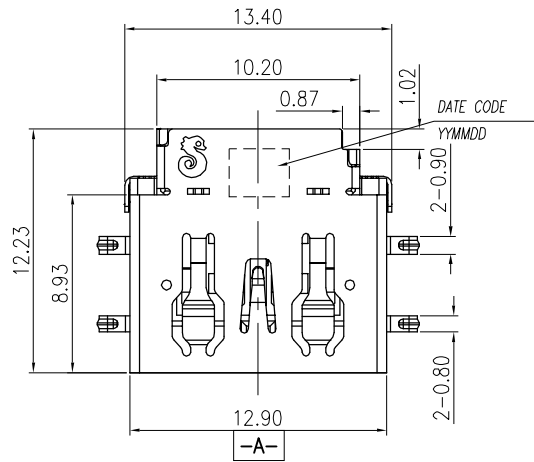


- SPECIFICATIONS:
1. ELECTRICAL CHARACTERISTICS:
1-1. CURRENT RATING: 1.8A (PIN1,4) ; OTHER CONTACTS 0.25A
1-2. CONTACT RESISTANCE: 30mΩ MAX.
1-3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
1-4. INSULATION RESISTANCE: 100MΩ MIN
 2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 3. HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: ☉
 4. HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING:
 5. FOR WAVE SOLDERING LEAD-FREE PROCESS.
 6. DATE : YYMMDD
 7. PACKAGING : TAPE & REEL.
 8. ▽ REPRESENT CPK DIMENSIONS.

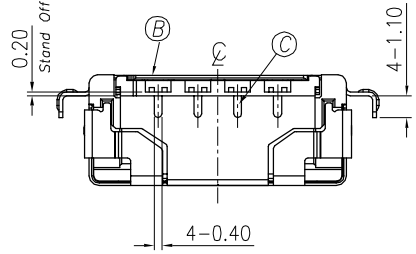

Pin NO.	Signal Assignment
# 1	VBUS
# 2	D-
# 3	D+
# 4	GND

C	TERMINAL	4	COPPER ALLOY	GOLD FLASH ON MATING AREA, Matte Sn 100u", PLATED ON SOLDERING 50u"NICKEL UNDER PLATING OVER ALL
B	SHELL	1	SUS304-1/2H 0.20t	NICKEL 60u" MIN
A	BODY	1	THERMOPLASTIC,UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS: ANGLES:		TITLE USB 2.0 REVERSE CONNECTOR		
X	:±0.5	X	:±2°	DWN Charles PART NO.:2UB3M04-002201F
X.X	:±0.3	X.X	:±1°	CHKD James SCALE 1:1 UNIT: mm
X.XX	:±0.2	APVD Boye	SIZE: A3	SHEET: 10F1 REV: A
CUSTOMMER COPY				