




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR No.:T081103-4A	Quan-Zhou	2009.03.27

SPECIFICATIONS:



1. ELECTRICAL CHARACTERISTICS:
- 1-1. RATING: 12V 1A
 - 1-2. CONTACT RESISTANCE: 100mΩ MAX. (INITIAL)
 - 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 250V AC FOR ONE MINUTE.
 - 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC.
2. MECHANICAL CHARACTERISTICS:
- 2-1. INSERTION FORCE: 0.7kgf~3.0kgf;
 - 2-2. WITHDRAWAL FORCE: 0.7kgf~3.0kgf;
 - 3. LIFE TEST: 5000 CYCLES MIN.
4. OTHER GENERAL SPEC. TO REFER "2AW1000-001111SPEC".
5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
6. GREEN PRODUCT IDENTIFICATION MARK ON JACK: 
7. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

Chalsea 607780195201
SINGATRON YYYMMDD
REV:01

LABEL DESCRIPTION DETAIL
作業方式為對折黏著包覆線材



RECOMMEND ANTENNA PART NO.
2AT1504-000111
2AT1502-000111

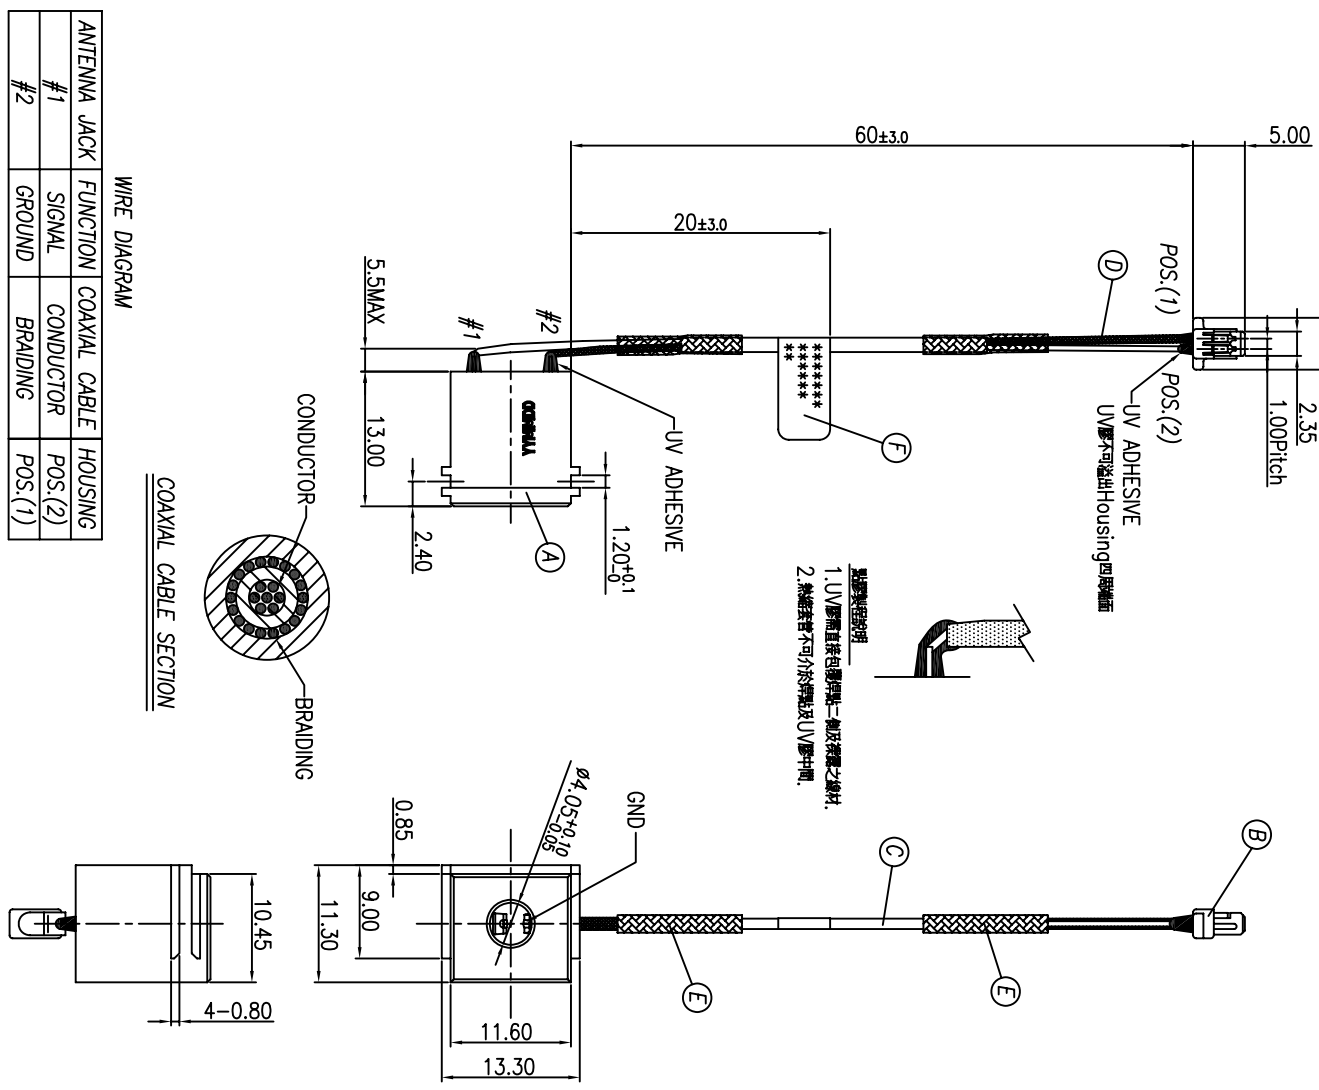

WIRE DIAGRAM

ANTENNA JACK #	FUNCTION	COAXIAL CABLE	HOUSING
#1	SIGNAL	CONDUCTOR	POS.(2)
#2	GROUND	BRAIDING	POS.(1)

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	ANTENNA JACK	1	TO SEE SINGATRON P/N:2AW1000-001111	WHITE
B	CONNECTOR	2	TU1001TTP0-A TERMINAL	TIN-PLATED
C	COAXIAL CABLE	1	UL1571 30AWG	GRAY
D	HEAT SHRINK TUBE	2	Ø1.0 L=20mm 125°C	BLACK
E	HEAT SHRINK TUBE	2	Ø2.0 L=12mm 125°C	BLACK
F	LABEL	1	L=20mm W=5mm	WHITE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

 Singatron Enterprise Co., Ltd.
信登企業股份有限公司

TITLE: ANTENNA JACK+WIRE

DWN: Quan-Zhou PART NO. 2AW1000-006111

CHKD: lusen SCALE: --- UNIT: mm

APVD: mx SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY