


REV/ECN NO OR DESCRIPTION	REVISED	DATE
A PDR NO.:T080815C4C	Steve	2009.04.28

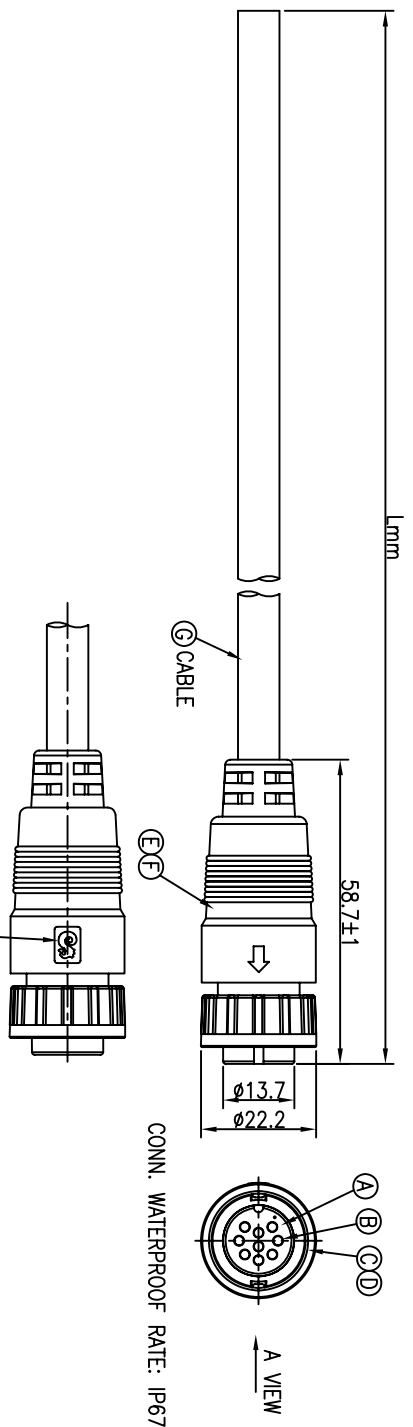

D	2CM3004-W03600		UL2464 16AWG*3C+AI/MY (UV Resistant),OD=φ7.0, Wire Color: 1:Brown 2:Blue 3:Black	16A
C	2CM3004-W07300		UL2464 24AWG*7C+AI/MY (UV Resistant),OD=φ5.0, Wire Color: 1.Blue 2.Black 3.Yellow 4.Red 5.Brown 6.Green 7.White	5A
B	2CM3004-W03300		UL2464 24AWG*8C+AI/MY (UV Resistant),OD=φ5.4, Wire Color: 1.Black 2.Brown 3.White 4.Blue 5.Red 6.Grey 7.Yellow 8.Green 9.Black	5A
A	2CM3004-W03300		UL2464 24AWG*8C+AI/MY (UV Resistant),OD=φ5.4, Wire Color: 1.Brown 2.Blue 3.White 4.Green 5.Yellow 6.Grey 7.Pink 8.Red 9.Black	5A

NOTES:  
 1. WATERPROOF RATE: IP67  
 IP67: IMMERSED IN 1M WATER FOR 30 MINUTES  
 2. CABLE LENGTH TOLERANCE: 1M~10M±5%mm, 11M~99M±500mm.  
 CABLE JACKET MATERIAL: BLACK PVC  
 3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".  
 4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.  
 5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **GREEN PASS**  
 6. ORDER INFORMATION:  
 2CM3004-WXXXX00

3-CURRENT RATING 5A  
 6-CURRENT RATING 16A  
 03- 3 PIN  
 07- 7 PIN  
 08- 8 PIN  
 09- 9 PIN

F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	*	Phosphor Alloy	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
XX :±0.3	XX :±1°
XXX :±0.2	

TITLE: CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE (3-9) PIN LOCK TYPE  
 DWG: Steve  
 CHKD: Quon  
 APVD: Max

Singatron Enterprise Co., Ltd.  
 信亨企業股份有限公司

PART NO. 2CM3004-WXXXX00  
 SCALE 1:1 UNIT: mm

SIZE: A3 SHEET: 1 OF 1 REV: A

CUSTOMER COPY