



REV/ECN NO	OR DESCRIPTION	REVISED	DATE
D	ADD DATE CODE	HAHUA	6/14/07
E	C080169, DWG UPDATE	R.YUAN	2008.10.14

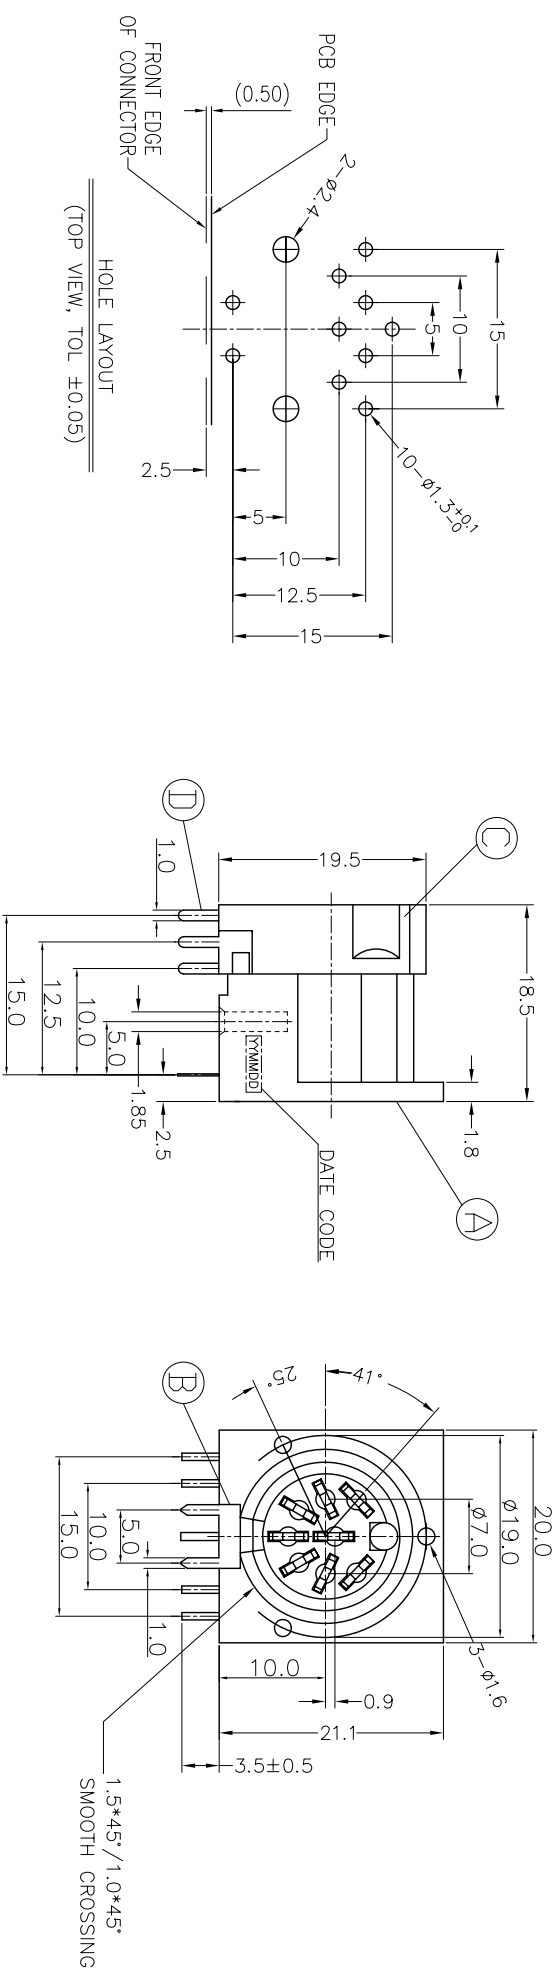

- SPECIFICATIONS:
- CURRENT RATING: AC:100V 1A  
DC:24V 2A
  - CONTACT RESISTANCE: 20mΩ MAX.
  - INSULATION RESISTANCE:DC 500V 100MΩ MIN
  - VOLTAGE WITHSTANDING:AC 500V 1 MINUTE
  - INSERTION FORCE: 5Kg MAX.
  - WITHDRAWAL FORCE: 1Kg MIN.
  - LIFE TEST:5,000 CYCLES MIN. AFTER TESTING,
  - CONTACT RESISTANCE SHALL NOT EXCEED 100mΩ
  - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  - FOR 260°C 10SEC WAVE SOLDERING LEAD-FREE PROCESS.
  - PRINTED DATE CODE"YYMMDD " ON TOP OF CONNECTOR.



D	CONTACT TERMINAL	8	COPPER ALLOY 0.7t	TIN ALLOY PLATING
C	COVER	1	THERMOPLASTIC, UL 94V-0, BLACK	
B	EARTH TERMINAL	1	COPPER ALLOY 0.20t	TIN ALLOY PLATING
A	BODY	1	THERMOPLASTIC, UL 94V-0, BLACK	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

TITLE	Singatron Enterprise Co., Ltd. 信晉企業股份有限公司 BP 262' DIN CONNECTOR		
DWN	R.YUAN	PART NO.	2DJ-1278P002
CHKD	2008.10.14	SCALE	1:1 UNIT: mm
APVD	R.YUAN	SIZE:	A3 SHEET:1 OF 1 REV: E
	2008.10.14		

CUSTOMER COPY