
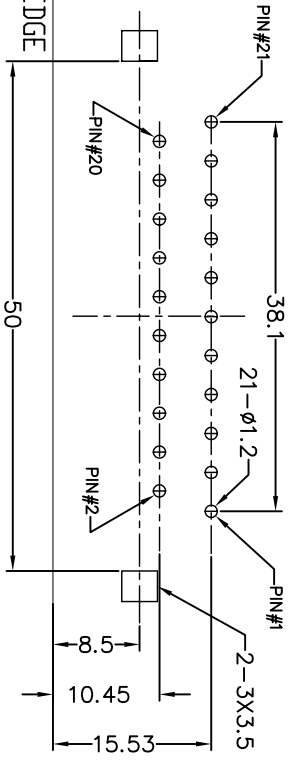


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
B	ECN NO.930194	Beryl	2005.15
C	ECN NO.940129	BERYL	2005.6.9
D	ECN NO.940129	BERYL	2005.8.1

- Specifications
1. Rating : 3A 100V AC
  2. Contact Resistance : 30mΩ max.
  3. Insulation Resistance : 1000MΩ min. at 500V DC
  4. Withstanding Voltage : 800V AC for one minute
  5. Operating Temperature Range : -25°C to +85°C
  6. Mating Force: 6.0KgF Max.
  7. Umating Force: 1.5KgF Min.

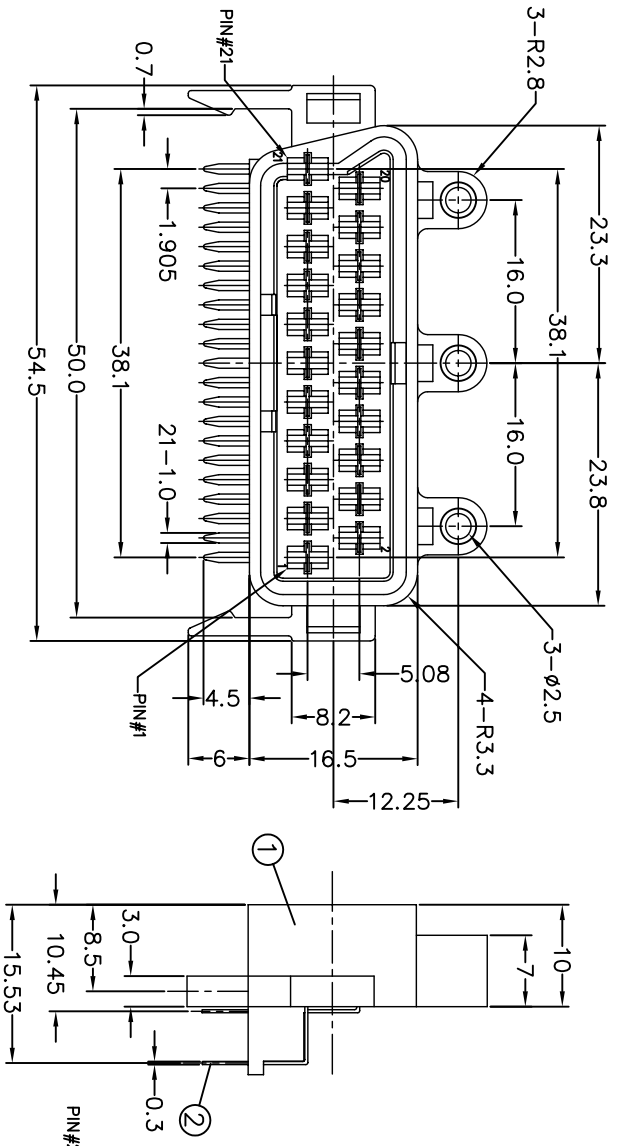

RECOMMENDED P.C.B. LAYOUT  
(TOP VIEW) TOLERANCE: ±0.05mm

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
2	CONTACT	21	PHOSPHOR BRONZE 0.3t	TIN PLATING
1	HOUSING	1	PC UL 94-0	BLACK COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

TITLE	SCART SOCKET
DWN	Beryl/2005.8.1
CHKD	Kan 2005.8.1
APVD	Aidan 2005.8.1
PART NO.	2DS-S106-001
SCALE:	2/1
UNIT:	MM
SIZE:	A3
SHEET:	1 OF 1
REV:	D

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司