
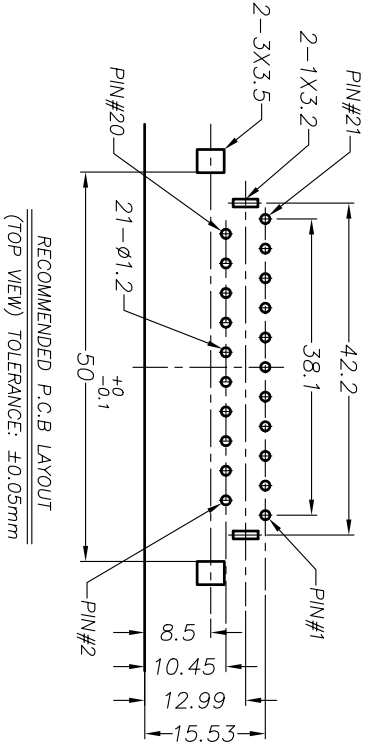


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR NO.20050810-1		BERYL	2005.8.29

- Specifications
1. Rating : 3A 100V AC
  2. Contact Resistance : 30mΩ max.
  3. Insulation Resistance : 1000MΩ min. at 500V DC
  4. Withstanding Voltage : 800V AC for one minute
  5. Operating Temperature Range : -25°C to +85°C
  6. Mating Force: 6.0Kgf Max.
  7. Unmating Force: 1.5Kgf Min.
  8. Durability: 5000Cycles
  9. Solder heat resistance : wave soldering 260°C 10secs
  10. To conform to the "SE-01-001" & "ROHS directive".
  11. Green product identification label in packing: **G.P. PASS**
  12. For lead-free product.

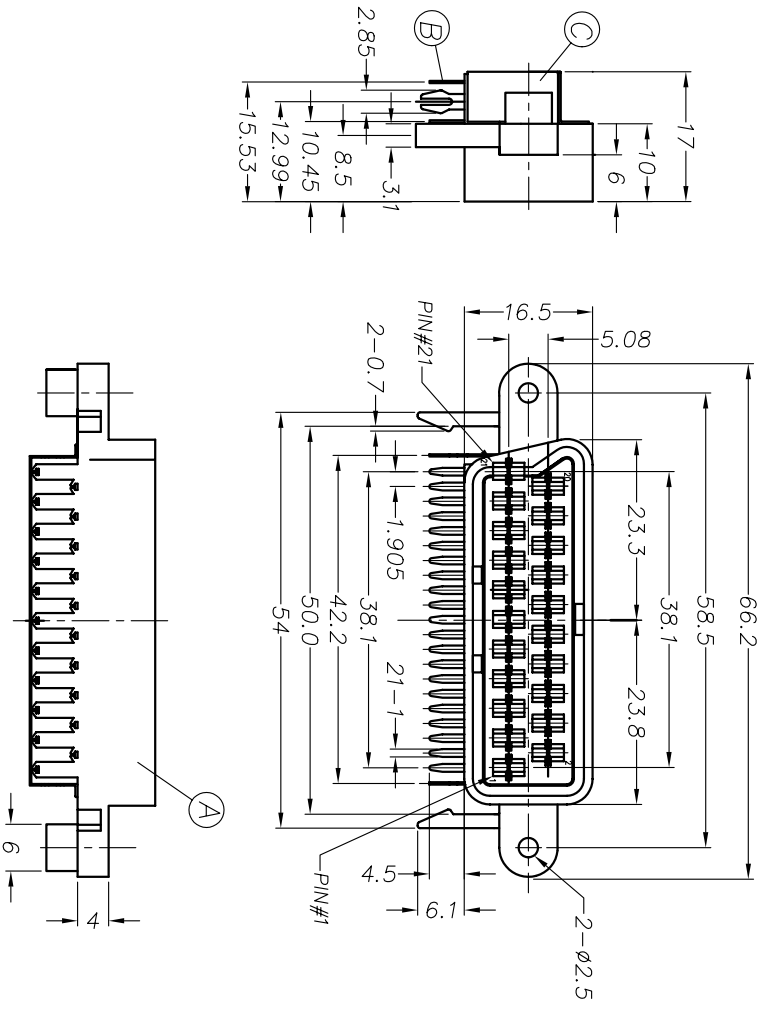

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
C	SHIELD	1	PHOSPHOR BRONZE 0.4t	CuSn PLATING
B	CONTACT	21	PHOSPHOR BRONZE 0.3t	CuSn PLATING
A	HOUSING	1	PC UL94-V0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

信普企業股份有限公司  
Singatron Enterprise Co., Ltd.

DECIMALS:		ANGLES:	
X	:±0.5	X	:±2°
X.X	:±0.3	X.X	:±1°
X.XX	:±0.2		

TITLE	SCART SOCKET			
DWN	BERYL 2005.8.29	PART NO.	2DS-T2IR-001	
CHKD	KAN 2005.8.29	SCALE:	3/2	UNIT: mm
APVD	ALAN 2005.8.2	SIZE:	A3	SHEET: 10F1

CUSTOMER COPY

