REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	LULU	2007.09.13

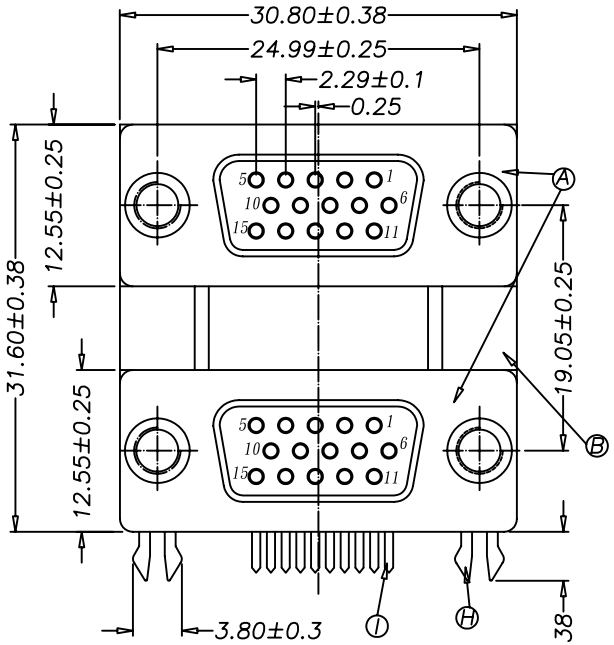

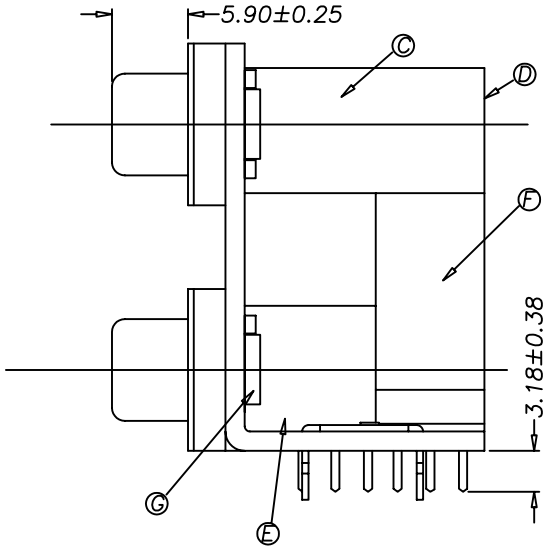

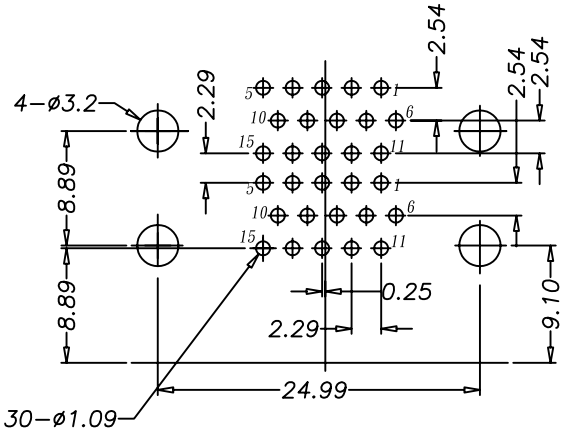

RECOMMENDED P.C.B. LAYOUT

TOP VIEW (TOLERANCE: ±0.05)

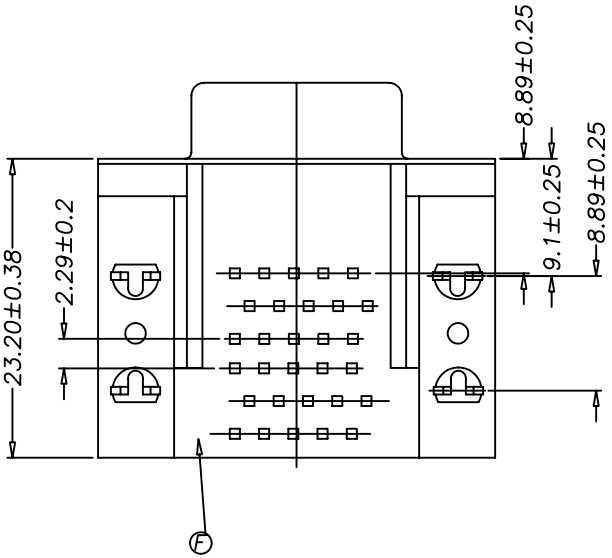

SPECIFICATIONS

1.SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10SECS.

2.TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"

3.GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**

4.SEE "2DS1518 SERIES" SPECIFICATION

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
I	CONTACT	30	BRASS	GOLD FLASH ON CONTACT AREA. TIN PLATING ON SOLDER TAILS, NICKEL UNDER PLATING OVER ALL .
H	BOARD LOCK	4	COPPER ALLOY	TIN PLATING
G	RIVET	4	COPPER ALLOY	NICKEL PLATING
F	HOUSING	1	PBT UL94V-0	BLACK COLOR
E	HOUSING	1	PBT UL94V-0	BLUE COLOR
D	COVER	1	PBT UL94V-0	BLUE COLOR
C	HOUSING	1	PBT UL94V-0	BLUE COLOR
B	BRACKET	2	COPPER ALLOY	NICKEL PLATING
A	SHELL	2	SPCC	NICKEL PLATING

PART NO.
2DS1518-000111

PACKAGE
1: TRAY
BODY COLOR
1: BLUE/BLACK
CONTACT PLATING
1:GOLD FLASH ON CONTACT AREA.
TIN PLATING ON SOLDER TAILS,
NICKEL UNDER PLATING OVER ALL .

UNLESS OTHERWISE SPECIFED TOLERANCES

DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2

ANGLES: X :±2° X.X :±1°

Singatron Enterprise Co., Ltd.
信音企業股份有限公司

TITLE	D-SUB R/A G/F 15F+15F(8.89mm)		
DWN	LULU 2007.9.13	**PART NO.2DS1518-000111**	
CHKD	JOHNSON 2007.9.13	SCALE:2/1	UNIT: mm
APVD	JOHNSON 2007.9.13	SIZE: A3	SHEET:1 OF 1 **REV: A**

CUSTOMER COPY

文件編號 RD-06-035-1A