


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PRODUCTED RELEASED	REVISION	2010.3.26
B	4P CONNECTOR 4P CONN NO.:C100204 4P DC JACK 4P DC JACK NO.:C100144	REVISION	2010.6.10
C	ECN NO.:C100389 MODIFY SINGARON P/N	LONGIANG	2010.11.2



(\*\*在4P CONNECTOR處線折彎為90度時量測)

焊接點(點錫)  
點錫範圍: L=2.80Max.  
W=2.80Max.  
H=1.80Max.


1. SEE "20W1022 SERIES SPECIFICATION"
2. TO CONFORM TO SINGARON HAZARDOUS SUBSTANCE FREE SPEC.
3. HALOGEN FREE PRODUCT IDENTIFICATION MARK ON JACK:
4. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
5. FOR HAND SOLDERING LEAD-FREE PROCESS.
6. PACKAGING: BAG
7. WIRE NO.:30W1022-4001161

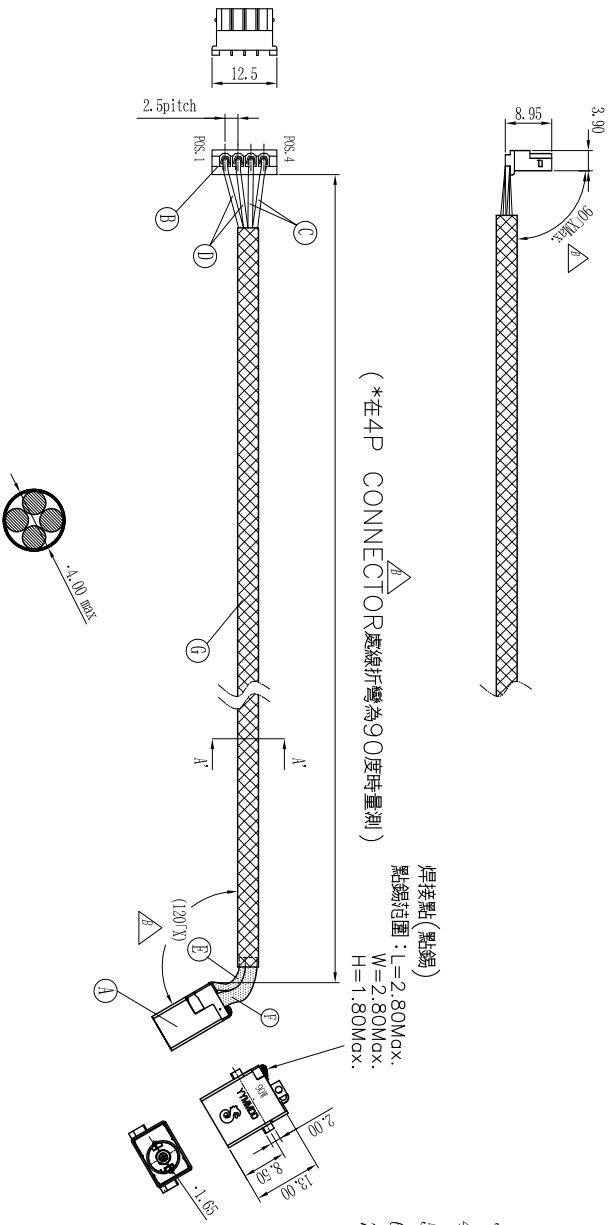

A'-A' SECTION

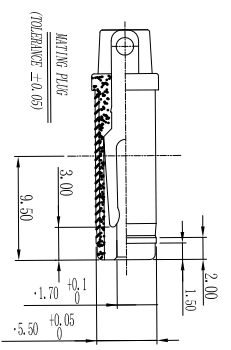

DC JACK 插入深度

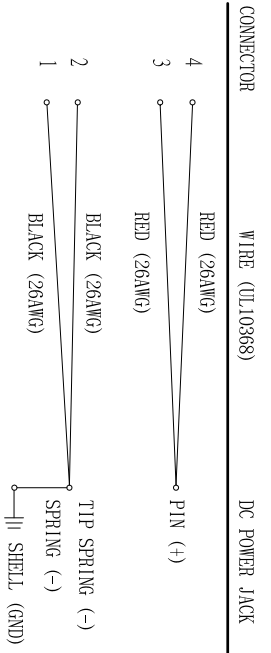

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
A	DC POWER JACK	1	SINGARON P/N: 2K2024-000131	BLUE(90W)
B	CONNECTOR	4	ISC-VI20N06 UL94V-0	WHITE COLOR
C	WIRE	2	UL10368 26AWG	RED COLOR
D	WIRE	2	UL10368 26AWG	BLACK COLOR
E	HEAT SHRINK TUBE	1	300T-125°	BLACK COLOR
F	HEAT SHRINK TUBE	1	300T-125°	BLACK COLOR
G	ACETATE CLOTH TAPE	1	N/A	BLACK COLOR

Singatron Enterprise Co., Ltd.  
信音企業股份有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCES		DC POWER JACK+WIRE	
DECIMALS:	ANGLES:	TITLE	
X : ±0.5	X : ±2°	DRAWING TITLE	
X.X : ±0.3	X.X : ±1°	CHD	
X.XX : ±0.2		APVD	

CUSTOMER COPY