
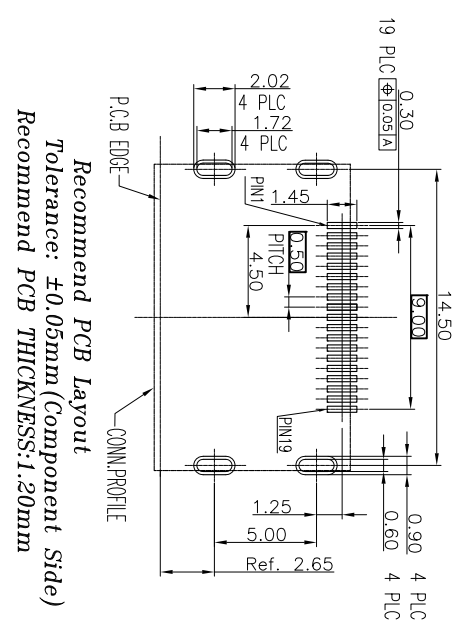


DATE CORE:
YYMMDD
(YY-YEAR
MM-MONTH
DD-DAY)

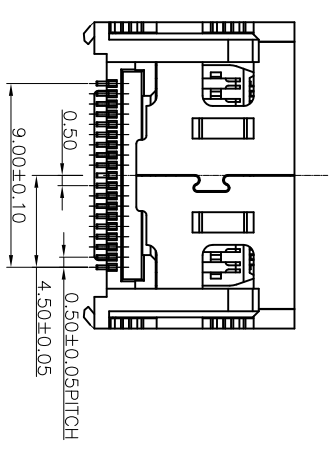

Recommend PCB Layout
Tolerance: ±0.05mm (Component Side)
Recommend PCB THICKNESS: 1.20mm

SPECIFICATIONS:

1. OTHER GENERAL SPEC. TO REFER "2HE1503 SERIES SPEC."
2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
3. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
4. REFLOW SOLDER CAPABLE 260°C 10SECS.
5. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
6. PACKAGE: SEE "2HE4000 SERIES " PACKAGE.

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C	PDR RELEASE / SERIES APPROVE 2HE1528-000111 → 2HE1528-000X11	Am/c	2009.06.17
D	ECN NO. L100037	IVY-C	2010.05.21
E	ECN NO. L100078	IVY-C	2010.09.03
F	ECN NO. L100101	IVY-C	2011.04.26

PART NO.
2HE1528-000X11

PACKAGE & REEL
HOUSING COLOR
1: BLACK
CONTACT PLATING
1: GOLD FLASH
2: GOLD 15u"
DIM A:
0: 1.0mm

E	INK		BLACK COLOR
D	INSULATION FILM	1	MYLAR
C	SHELL	1	COPPER ALLOY
B	CONTACT	19	COPPER ALLOY
A	HOUSING	1	LCP UL 94V-0
NO	DESCRIPTION		MATERIAL
UNLESS OTHERWISE SPECIFIED TOLERANCES			
SINGATRON ENTERPRISE CO., LTD.			
信亨企業股份有限公司			
TITLE HDNI TYPE A FEMALE ,SMT,REVERSE W/O FLANGE			
DWG DWG-20100203 PART NO. 2HE1528-000X11			
CHKD DWG-1-20100203 SCALE:N/A UNIT: mm			
APVD DWG-1-20100203 SIZE: A3 SHEET: 1 OF 1 REV: F			

CUSTOMER COPY