


REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
C		ZPH-2202-0102--ZPH-22X2-XX2 SERIES APPROVED PART NO.ZPH-22X2-302 PART NO.ZPH-22X2-062	LULU	2007.5.14

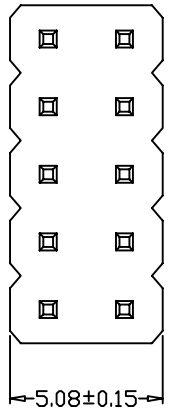


SPECIFICATIONS:

- CURRENT RATING: 3 AMPS.
- INSULATOR RESISTANCE: 5000 MΩ MIN.
- DIELECTRIC WITHSTANDING: AC 500V
- OPERATING TEMPERATURE: -40°C TO 105°C
- TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- SOLDER HEAT RESISTANCE : 260°C 10 SECS.(PA-6T)
- SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10SECS.(PBT)

PART NO.


ZPH-22X2-XX2

NO. OF CONTACTS(SEE "TABLE 1")
INSULATOR MATERIAL
0: PBT
A: PA-6T

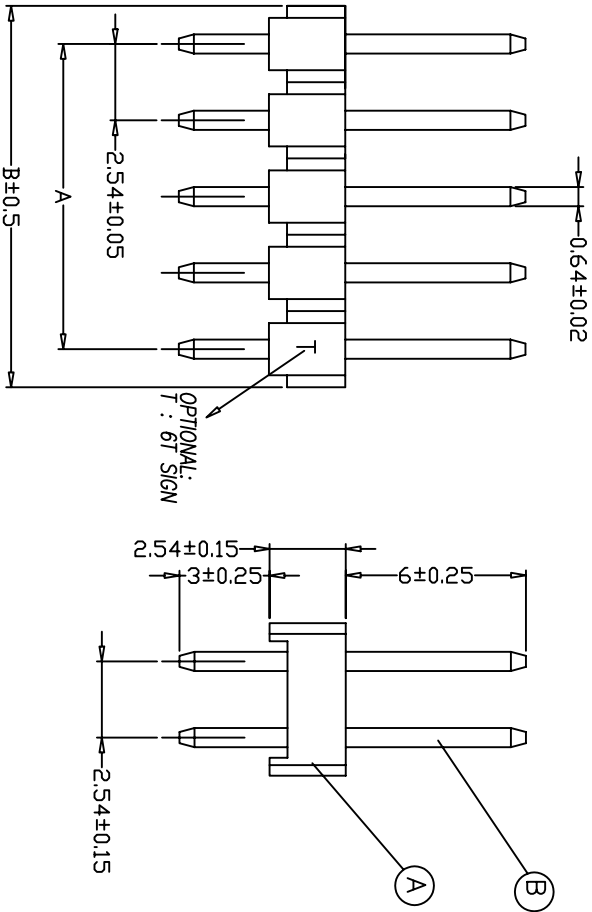

"TABLE 1:

DRAW NO.	NO. OF CONTACTS	DIMENSIONS	
		A	B
ZPH-22X2-002	4	2.54	5.08
ZPH-22X2-062	6	5.08	7.62
ZPH-22X2-082	8	7.62	10.16
ZPH-22X2-102	10	10.16	12.70
ZPH-22X2-122	12	12.70	15.24
ZPH-22X2-142	14	15.24	17.78
ZPH-22X2-162	16	17.78	20.32
ZPH-22X2-182	18	20.32	22.86
ZPH-22X2-202	20	22.86	25.40
ZPH-22X2-222	22	25.40	27.94
ZPH-22X2-242	24	27.94	30.48
ZPH-22X2-262	26	30.48	33.02
ZPH-22X2-282	28	33.02	35.56
ZPH-22X2-302	30	35.56	38.10
ZPH-22X2-322	32	38.10	40.64
ZPH-22X2-342	34	40.64	43.18
ZPH-22X2-362	36	43.18	45.72
ZPH-22X2-382	38	45.72	48.26
ZPH-22X2-402	40	48.26	50.80
ZPH-22X2-422	42	50.80	53.34
ZPH-22X2-442	44	53.34	55.88
ZPH-22X2-462	46	55.88	58.42
ZPH-22X2-482	48	58.42	60.96
ZPH-22X2-502	50	60.96	63.50
ZPH-22X2-522	52	63.50	66.04
ZPH-22X2-542	54	66.04	68.58
ZPH-22X2-562	56	68.58	71.12
ZPH-22X2-582	58	71.12	73.66
ZPH-22X2-602	60	73.66	76.20
ZPH-22X2-622	62	76.20	78.74
ZPH-22X2-642	64	78.74	81.28
ZPH-22X2-662	66	81.28	83.82
ZPH-22X2-682	68	83.82	86.36
ZPH-22X2-702	70	86.36	88.90
ZPH-22X2-722	72	88.90	91.44
ZPH-22X2-742	74	91.44	93.98
ZPH-22X2-762	76	93.98	96.52
ZPH-22X2-782	78	96.52	99.06

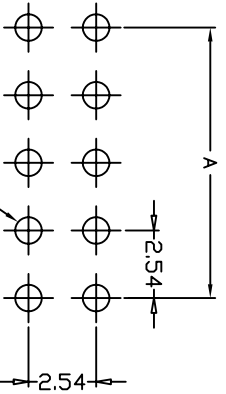

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE: ±0.05)

B	CONTACT PIN	*	BRASS	GOLD FLASH
A <td>INSULATOR</td> <td>1</td> <td>SEE "PART NO"</td> <td>BLACK COLOR</td>	INSULATOR	1	SEE "PART NO"	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

TITLE 2.54mm(0.1")PIN HEADER

DWN LULU 2007.5.16 PART NO.ZPH-22X2-XX2
CHKD EBN 2007.5.16 SCALE:3/1 UNIT: mm
APVD AMBA 2007.5.16 SIZE: A3 SHEET: 1 OF 1 REV: C

Singatron Enterprise Co., Ltd.
信譽企業股份有限公司

CUSTOMER COPY