

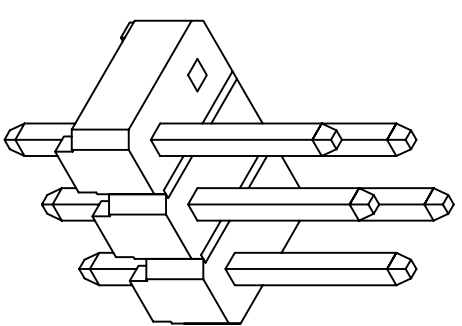
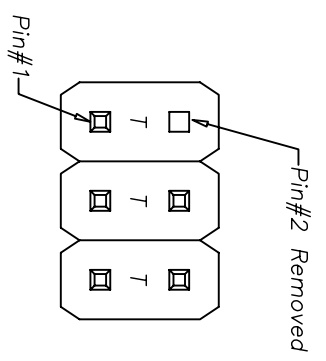


REV	ECN NO	OR DESCRIPTION	REVISED	DATE
A		PDR RELEASE	LULU	2007.10.26

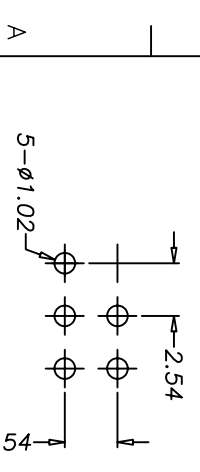

SPECIFICATIONS

- Current Rating: 3 Amps
- Insulator resistance: 5000 Megohms min.
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40°C to +105°C
- Max. Processing Temp: 230°C for 30 seconds
260°C for 5 seconds
WAVE SOLDERING 260°C 10SECS.
- SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10SECS.
- TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
- GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: **G.P. PASS**
- SEE "2PH1512 SERIES SPEC"
- PACKING: SEE "2PH1511 SERIES"

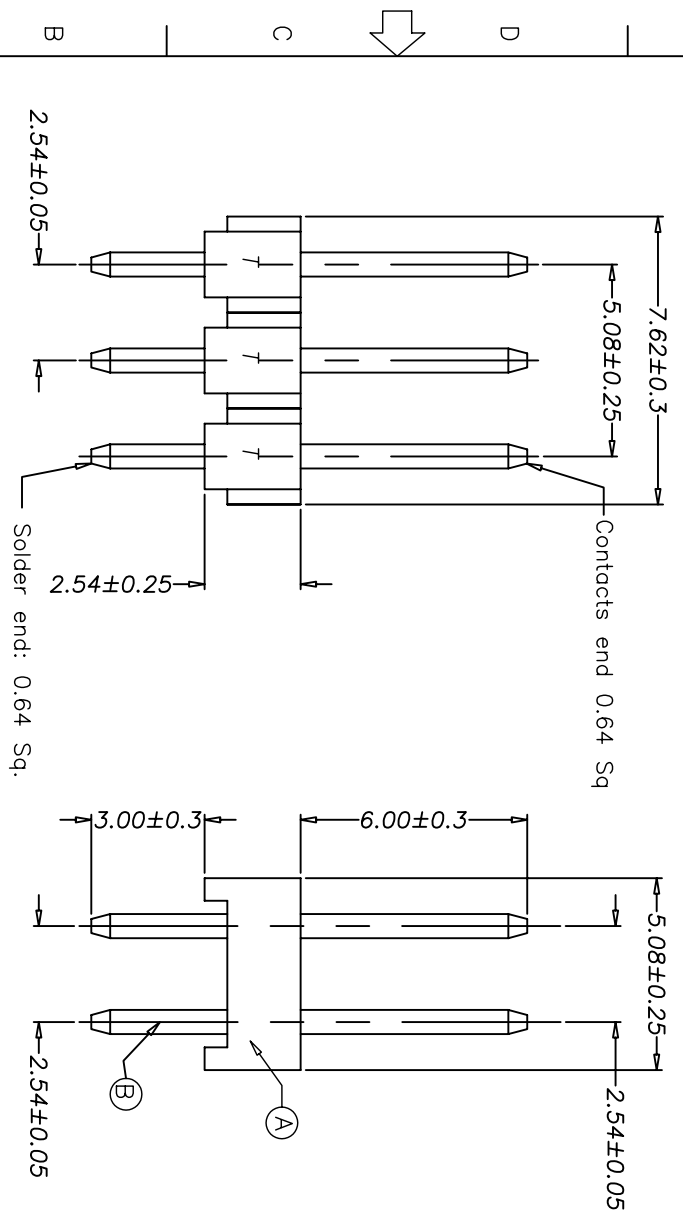

PART NO.
2PH1511-000111

PACKAGE
1: BAG

HOUSING COLOR
1: BLACK

CONTACT PLATING
1: Gold Plating Over Nickel
Plating 50u"

B	CONTACT	5	BRASS	GOLD FLASH OVER NICKEL PLATING 50u"
A	INSULATOR	1	PA-6T UL 94V-0	BLACK COLOR
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:			
X :±0.5	X :±2°			
X.X :±0.3	X.X :±1°			
X.XX :±0.2				
TITLE		2.54mm (0.1") PIN HEADER (2202 SERIES)		
DWN	LULU 2007.10.26	PART NO.	2PH1511-000111	
CHKD	LANKSON 2007.10.26	SCALE:	1/1	UNIT: mm
APVD	LANKSON 2007.10.26	SIZE:	A3	SHEET: 1 OF 1
CUSTOMER COPY				

Singatron Enterprise Co., Ltd.
信晉企業股份有限公司