





REV.	ECN NO.	OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	EVEN	2006.6.29	
B	ECN NO: 7060343	EVEN	2006.11.28	

**SPECIFICATION:**

1. CURRENT RATING : 3A AC/DC
2. VOLTAGE RATING : 250V AC/DC
3. CONTACT RESISTANCE : 20mΩ (max.)
4. INSULATION RESISTANCE : 1,000MΩ MIN
5. WITHSTAND VOLTAGE : 1,500V AC/MINUTE
6. TEMPERATURE RANGE : -25°C TO +85°C
7. SOLDER HEAT RESISTANCE: WAVE SOLDERING 260°C 10 SECS.
8. TO CONFORM TO THE "SE-01-001" & "ROHS DIRECTIVE"
9. GREEN PRODUCT IDENTIFICATION LABEL IN PACKING: G.P. PASS
10. FOR WAVE SOLDERING LEAD-FREE PROCESS.



Recommend PCB Layout  
Jack Top View (t=1.6mm)  
(Tolerance: ±0.05mm)

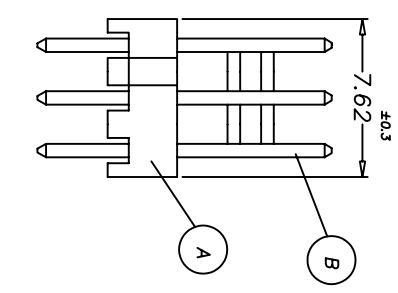

- 2PH1521-003111
- PACKAGE
- 1: BAG
- BODY COLOR
- DEEP RED
- CONTACT PLATING
- 1: TIN PLATING
- NO. OF CIRCUITS: 03

B	CONTACT	3	BRASS 0.64mm SQUARE PIN	TIN PLATING
A	HOUSING	1	NYLON 66 UL 94V-0	DEEP RED
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Enterprise Co., Ltd. 信登企業股份有限公司				
DECIMALS: ANGLES:				
X	:±0.5	X	:±2°	
X.X	:±0.3	X.X	:±1°	
X.XX	:±0.2			
TITLE 2.54mm PITCH WIRE TO BOARD CONNECTOR 180°				
DWN	REV 2006.11.28	PART NO.	2PH1521-003111	
CHKD	REV 2006.11.28	SCALE: 4/1	UNIT: mm	
APVD	REV 2006.11.28	SIZE: A3	SHEET: 1 OF 1	REV: B
<b>CUSTOMER COPY</b>				