










		1			2	
F	2CT3033-X02400		10A	18AWG~20AWG *2C		
	2CT3033-X03400		10A	18AWG~20AWG *3C		
E	2CT3033-X04400		10A	18AWG~20AWG *4C		
D	2CT3033-X04300		5A	22AWG~24AWG *4C		
C	2CT3033-X05300		5A	22AWG~24AWG *5C		
	2CT3033-X06300		5A	22AWG~24AWG *6C		
	2CT3033-X07300		5A	22AWG~24AWG *7C		
A	2CT3033-X08300		5A	22AWG~24AWG *8C		
	P/N:	Pin Assignments Front View	Current Rating	Recommended Cable AWG		

NOTES:

- WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
- SEAL FOR CABLE OD:Ø4.0mm~Ø6.5mm
- SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
- ORDER INFORMATION:
2CT3033-X0XX00

3-CURRENT RATING 5A
 4-CURRENT RATING 10A
 02~08 - 2~8 PIN

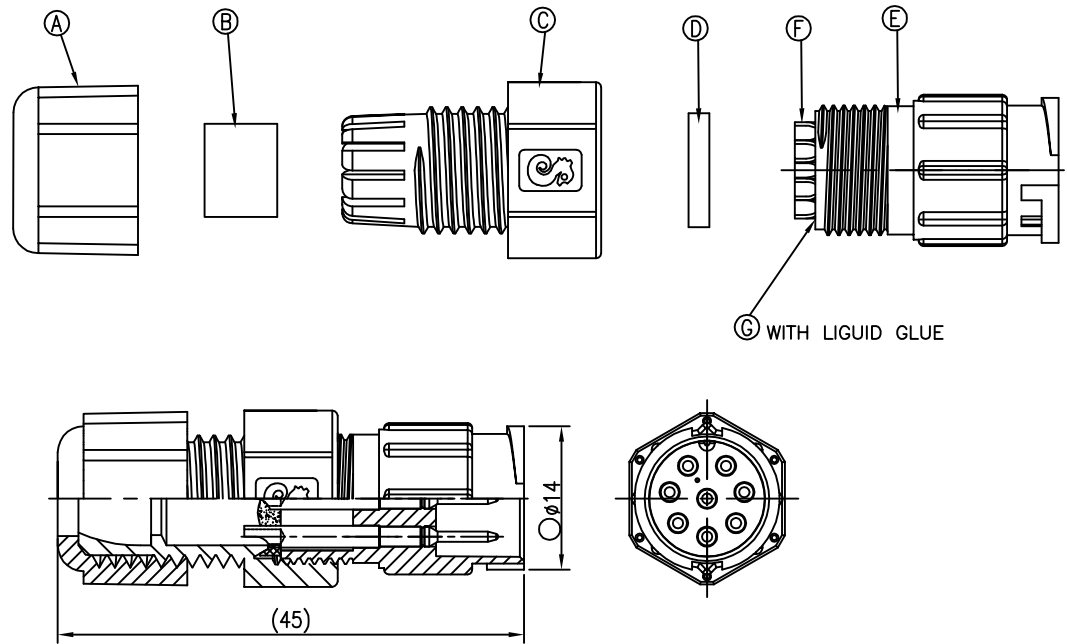

G	LIQUID GLUE	1		BLACK
F	MALE PIN	*	HBI59-1.5B	6u" GOLD PLATING OVER NICKEL PLATING
E	BODY	1	NYLON+33%GF	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PPE	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PPE	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司		
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR STANDARD SIZE (IP67)
X.X	:±0.3	X.X	:±1°	MALE CONN. MALE (2~8)PIN ASSEMBLY TYPE
X.XX	:±0.2			
DWN	joe-liao	PART NO.2CT3033-X0□□00		
CHKD	Steve	SCALE 2:1	UNIT: mm	
APVD	Max	SIZE: A3	SHEET:1 OF 1	REV:A
CUSTOMER COPY				