



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO. C100201-1A	Harlen	2010.05.12
B	ECN NO.:S202006-R02	RZ	2020.06.04

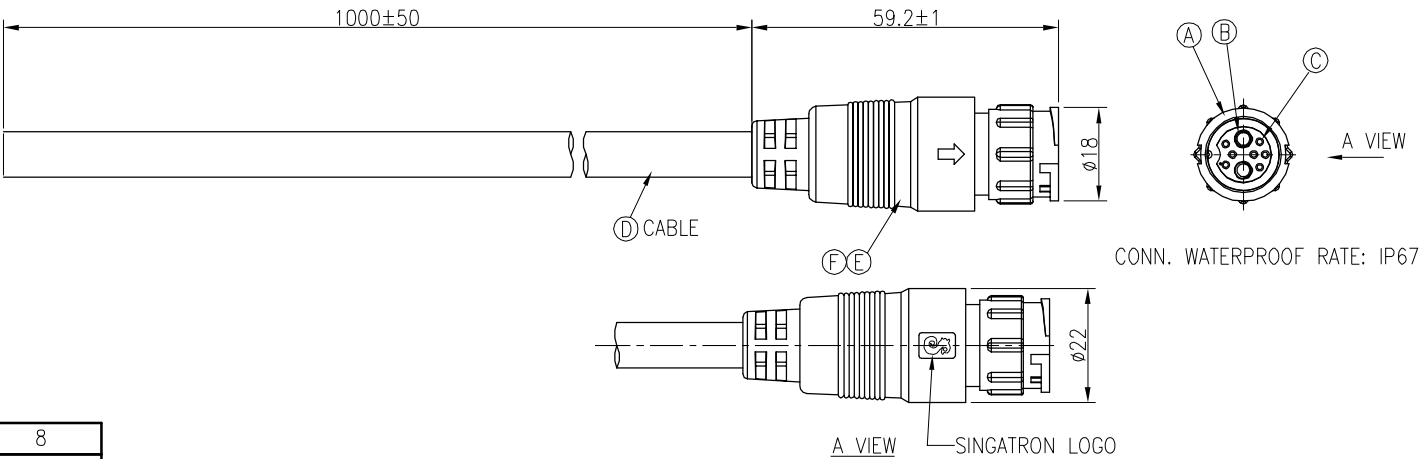

BROWN	8
VIOLET	9
ORANGE	5
BLUE	4
GRAY	3
WHITE	7
GREEN	1
BLACK	6
RED	2
WIRE COLOR	CONN.

PIN OUT



Pin Assignments
Front View

- NOTES:
- WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 - ELECTRICAL CHARACTERISTICS
CURRENT RATING: 2+20A
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**

F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	CABLE	1	JL2464 (24AWG*7C+AL D+B)+14AWG*2C+AL(UV)	BLACK(PVC JACKET)
C	FEMALE PIN	7	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
B	FEMALE PIN	2	Phosphor Bronze	1~3u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:		ANGLES:	TITLE	
X	:±0.5	X	:±2°	CIRCULAR MIDDLE SIZE (IP67) MALE CONN. FEMALE (2+7) PIN(2+20A) LOCK TYPE
X.X	:±0.3	X.X	:±1°	DWN RZ PART NO.2CM3030-W09E01
X.XX	:±0.2			CHKD Cerry SCALE 1:1 UNIT: mm
				APVD William SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				