

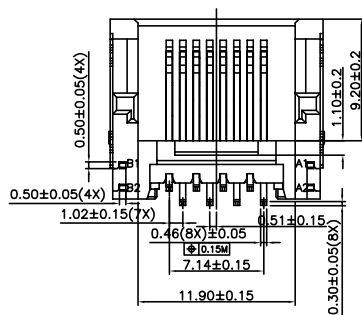
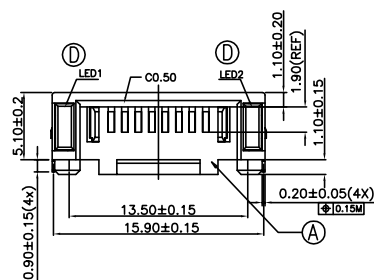

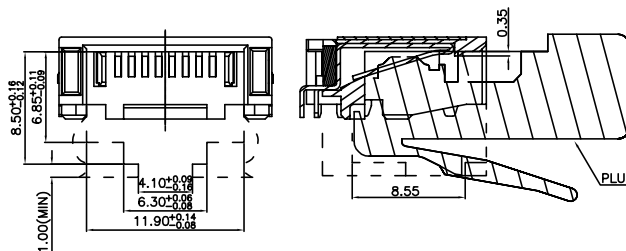


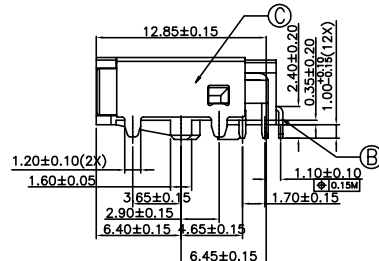

LED CHARACTERISTIC		
LED 1	B1(-) B2(+)	YELLOW
LED 2	A1(-) A2(+)	GREEN

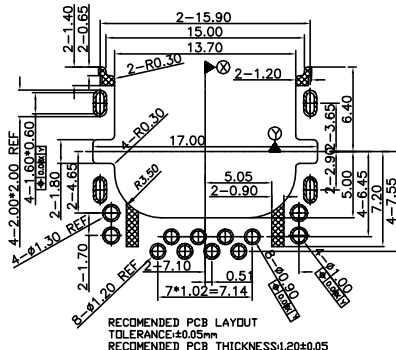

SPECIFICATIONS:

- VOLTAGE RATING: 150 VAC MAX.
- CURRENT RATING: 1.5 AMP MAX.
- LOW LEVEL CONTACT RESISTANCE: 50 MILLIOHMS INITIAL.
- INSULATION RESISTANCE: 500M OHMS MIN. AT 500 VDC.
- DIELECTRIC WITHSTANDING VOLTAGE: 800 VAC 60Hz 1 MINUTE.
- LED'S CHARACTERISTICS:
 - FORWARD CURRENT: 25±5mA.
 - FORWARD VOLTAGE: 2.2 VOLTS TYPICAL.
 - REVERSE VOLTAGE: 5.0 VOLTS MAX.
 - LED Luminous intensity 5~10mcd
 - YELLOW LED Wavelength 585~597nm
 - GREEN LED Wavelength 564.5~576.5nm
- DURABILITY: 5,000 CYCLES.
- OPERATING TEMPERATURE: -30°C TO +70°C.
- OTHER GENERAL SPEC. TO REFER "2RJ1656 SERIES SPEC".
- TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING:
- PACKAGE: SEE "2RJ1656 SERIES" PACKAGE.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- THE FEATURE TO PREVENT FROM RJ11 PLUG INSERTING AND WITHSTANDING INSERTION FORCE IS 2.5KGF Min.

PART NO.
2RJ1656-000111F

SUFFIX: HALOGEN FREE

PACKAGE

1: TAPE & REEL

HOUSING COLOR

1: BLACK

CONTACT AREA PLATING

1: GOLD FLASH PLATING ON CONTACT AREA,

50u" MATTE TIN(Sn) PLATING ON SOLDER AREA.

50u" MIN NICKEL UNDERPLATED OVERALL.

F	COVER	-	LCP UL 94V-0	BLACK
E	INK	-	INK	BLACK
D	LED	2	LED	YELLOW/GREEN
C	SHIELD	1	SUS 201	50u" NICKEL PLATED
B	CONTACT	8	C5210	SEE PART NO.
A	HOUSING	1	PA10T UL 94V-0	BLACK

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
DECIMALS:	ANGLES:	TITLE RJ45 JACK, W/LED, R/A, SINKING, DIP TYPE ,H=5.10mm		
X :±0.5	X :±2°	DWN	EVEN 2018.04.02	PART NO. 2RJ1656-000111F
X.X :±0.3	X.X :±1°	CHKD	INCELA 2018.04.02	SCALE 3/1 UNIT: mm
X.XX :±0.2		APVD	INCELA 2018.04.02	SIZE: A3 SHEET: 1 OF 1 REV: F

CUSTOMER COPY