


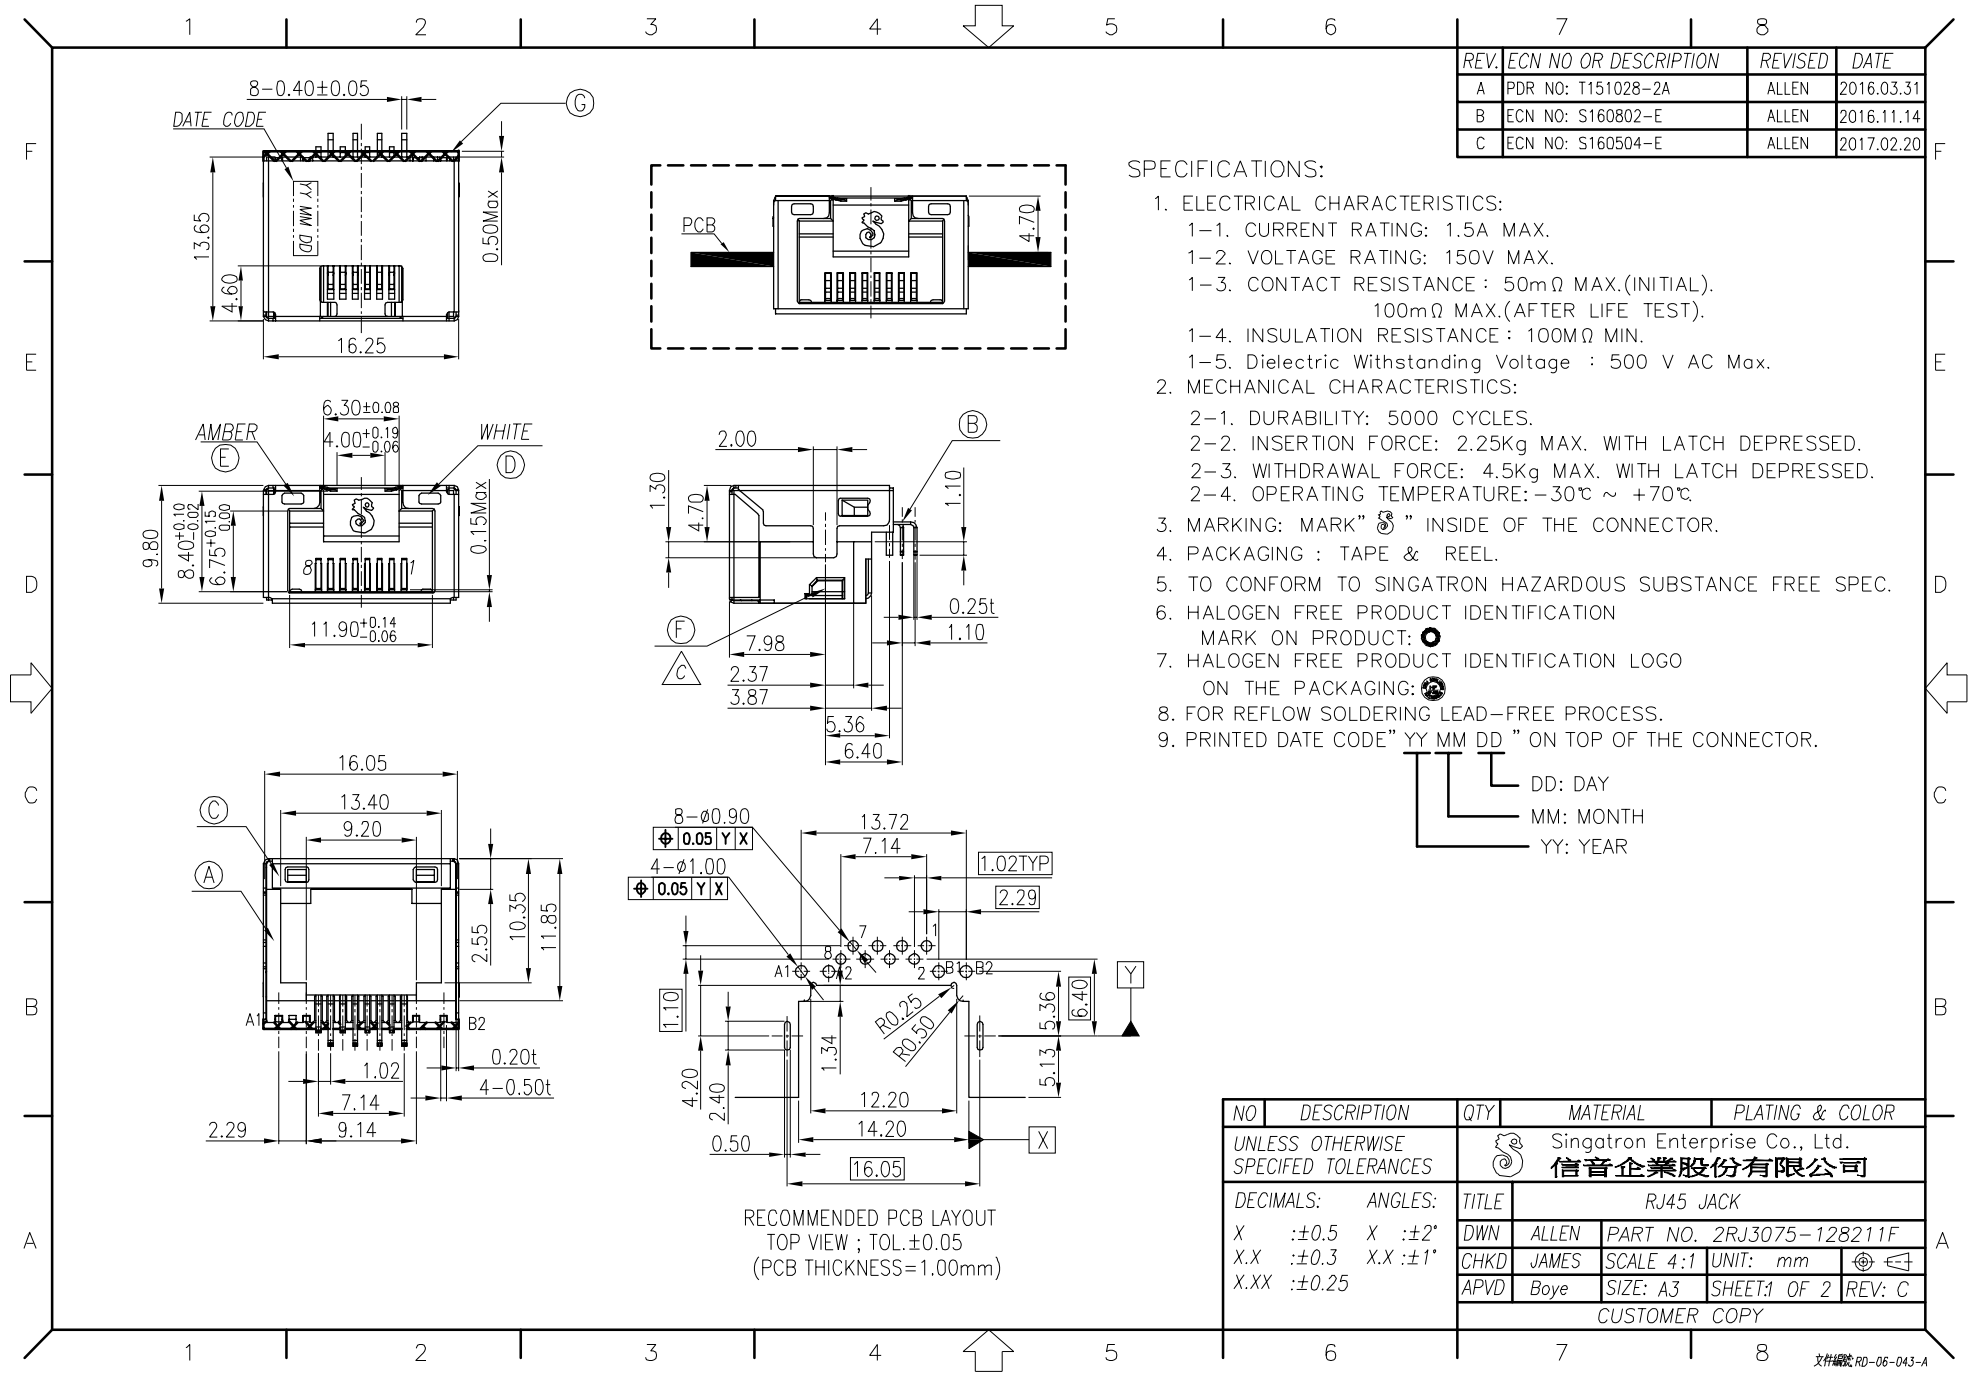

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO: T151028-2A	ALLEN	2016.03.31
B	ECN NO: S160802-E	ALLEN	2016.11.14
C	ECN NO: S160504-E	ALLEN	2017.02.20

SPECIFICATIONS:

- 1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CURRENT RATING: 1.5A MAX.
 - 1-2. VOLTAGE RATING: 150V MAX.
 - 1-3. CONTACT RESISTANCE : 50mΩ MAX.(INITIAL).
100mΩ MAX.(AFTER LIFE TEST).
 - 1-4. INSULATION RESISTANCE : 100MΩ MIN.
 - 1-5. Dielectric Withstanding Voltage : 500 V AC Max.
- 2. MECHANICAL CHARACTERISTICS:
 - 2-1. DURABILITY: 5000 CYCLES.
 - 2-2. INSERTION FORCE: 2.25Kg MAX. WITH LATCH DEPRESSED.
 - 2-3. WITHDRAWAL FORCE: 4.5Kg MAX. WITH LATCH DEPRESSED.
 - 2-4. OPERATING TEMPERATURE:-30℃ ~ +70℃.
- 3. MARKING: MARK "S" "INSIDE OF THE CONNECTOR.
- 4. PACKAGING : TAPE & REEL.
- 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- 6. HALOGEN FREE PRODUCT IDENTIFICATION
MARK ON PRODUCT: S
- 7. HALOGEN FREE PRODUCT IDENTIFICATION LOGO
ON THE PACKAGING: S
- 8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- 9. PRINTED DATE CODE "YY MM DD " ON TOP OF THE CONNECTOR.

DD: DAY
MM: MONTH
YY: YEAR

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	RJ45 JACK	
X : ±0.5	X : ±2°	DWN	ALLEN	PART NO. 2RJ3075-128211F
X.X : ±0.3	X.X : ±1°	CHKD	JAMES	SCALE 4:1 UNIT: mm
X.XX : ±0.25		APVD	Boye	SIZE: A3 SHEET: 1 OF 2 REV: C
CUSTOMER COPY				