


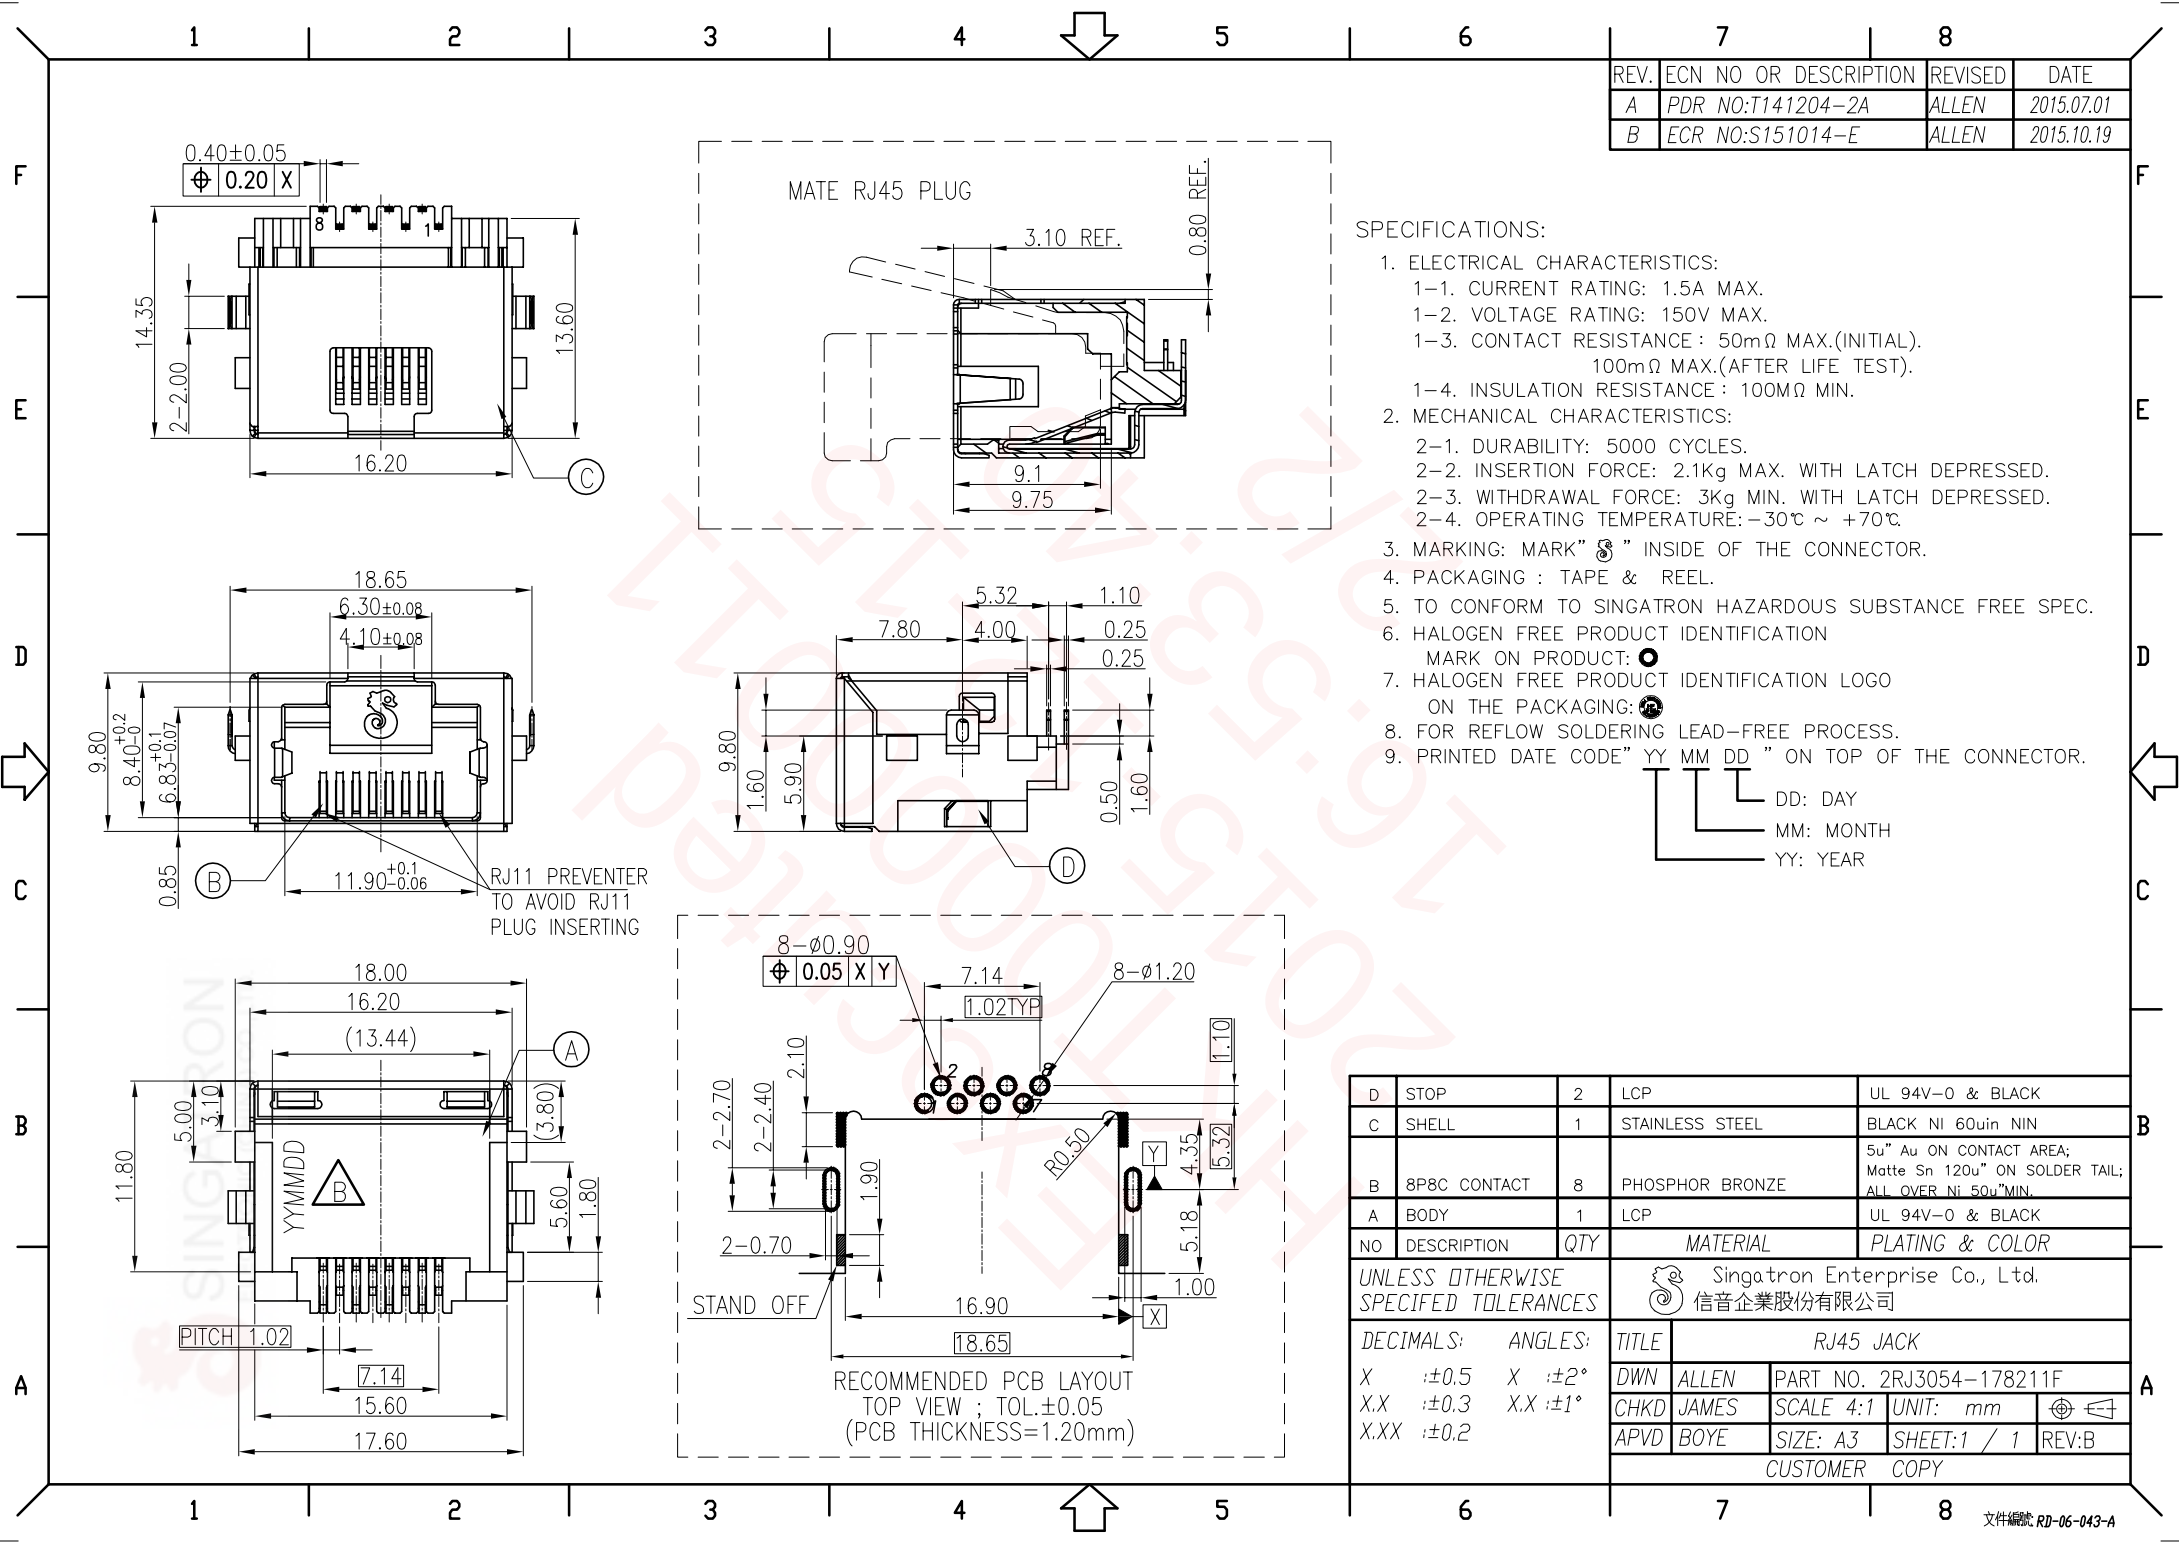

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T141204-2A	ALLEN	2015.07.01
B	ECR NO:S151014-E	ALLEN	2015.10.19

SPECIFICATIONS:

- 1. ELECTRICAL CHARACTERISTICS:
 - 1-1. CURRENT RATING: 1.5A MAX.
 - 1-2. VOLTAGE RATING: 150V MAX.
 - 1-3. CONTACT RESISTANCE : 50mΩ MAX.(INITIAL).
100mΩ MAX.(AFTER LIFE TEST).
 - 1-4. INSULATION RESISTANCE : 100MΩ MIN.
- 2. MECHANICAL CHARACTERISTICS:
 - 2-1. DURABILITY: 5000 CYCLES.
 - 2-2. INSERTION FORCE: 2.1Kg MAX. WITH LATCH DEPRESSED.
 - 2-3. WITHDRAWAL FORCE: 3Kg MIN. WITH LATCH DEPRESSED.
 - 2-4. OPERATING TEMPERATURE: -30℃ ~ +70℃.
- 3. MARKING: MARK "S" INSIDE OF THE CONNECTOR.
- 4. PACKAGING : TAPE & REEL.
- 5. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
- 6. HALOGEN FREE PRODUCT IDENTIFICATION
MARK ON PRODUCT: ○
- 7. HALOGEN FREE PRODUCT IDENTIFICATION LOGO
ON THE PACKAGING: ⊗
- 8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- 9. PRINTED DATE CODE" YY MM DD " ON TOP OF THE CONNECTOR.

DD: DAY
MM: MONTH
YY: YEAR

D	STOP	2	LCP	UL 94V-0 & BLACK
C	SHELL	1	STAINLESS STEEL	BLACK NI 60uin NIN
B	8P8C CONTACT	8	PHOSPHOR BRONZE	5u" Au ON CONTACT AREA; Matte Sn 120u" ON SOLDER TAIL; ALL OVER Ni 50u"MIN.
A	BODY	1	LCP	UL 94V-0 & BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:		ANGLES:	TITLE	
X :±0.5		X :±2°	RJ45 JACK	
X.X :±0.3		X.X :±1°	DWN ALLEN	PART NO. 2RJ3054-178211F
X.XX :±0.2			CHKD JAMES	SCALE 4:1 UNIT: mm
			APVD BOYE	SHEET:1 / 1 REV:B
CUSTOMER COPY				