

1

2

3

4


5

6


7

8





REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR RELEASE	IVY-C	2014.07.22
B	ECN NO:L140103	IVY-C	2014.08.27



④
D/C

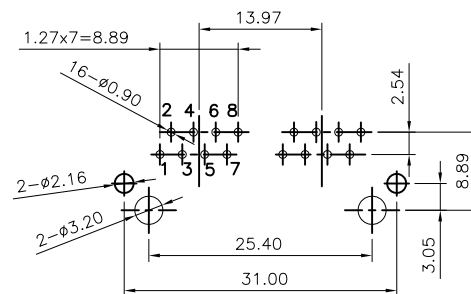

PCB Layout
Component Side Shown

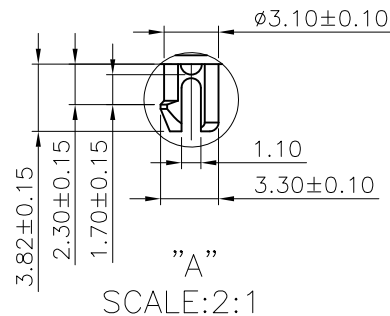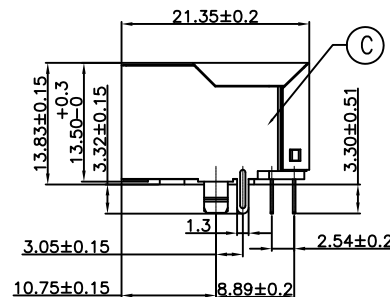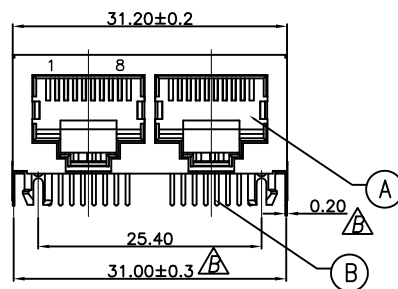

SPECIFICATIONS:

1. VOLTAGE RATING: 125 VAC MAX.
2. CURRENT RATING: 1.5 AMP MAX.
3. INSULATION RESISTANCE: 1000M OHMS MIN. AT 500 VDC.
4. DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC 60Hz 1 MINUTE.
5. DURABILITY: 750 CYCLES .
6. OPERATING TEMPERATURE: -40°C TO +85°C.
7. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
8. HALOGEN FREE PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
9. PACKAGE: SEE "2RJ1698 SERIES" PACKAGE.
10. FOR WAVE SOLDERING LEAD-FREE PROCESS.
11. MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
12. OTHER GENERAL SPEC. TO REFER "2RJ1698 SERIES SPEC".

PART NO.

2RJ1698-000111H

SUFFIX: HALOGEN

PACKAGE

1: TRAY

HOUSING COLOR

1: BLACK

CONTACT AREA PLATING

1: GOLD FLASH PLATED ON CONTACT AREA
TIN PLATED ON SOLDER AREA

D	INK			BLACK
C	SHIELD	1	COPPER ALLOY	NICKEL
B	CONTACT	16	COPPER ALLOY	SEE PART NO.
A	HOUSING	1	HIGH-TEMP. THERMO-PLASTIC, UL 94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Enterprise Co., Ltd. 信音企業股份有限公司		
DECIMALS:	ANGLES:	TITLE	1XN SIDE ENTRY PCB JACK 8P	
X :±0.5	X :±2°	DWN	NY-C 2014.08.27	PART NO. 2RJ1698-000111H
X.X :±0.3	X.X :±1°	CHKD		SCALE1.4:1 UNIT: mm
X.XX :±0.2		APVD	ANGEL2014.08.27	SIZE: A3 SHEET:1 OF 1 REV: B
CUSTOMER COPY				