
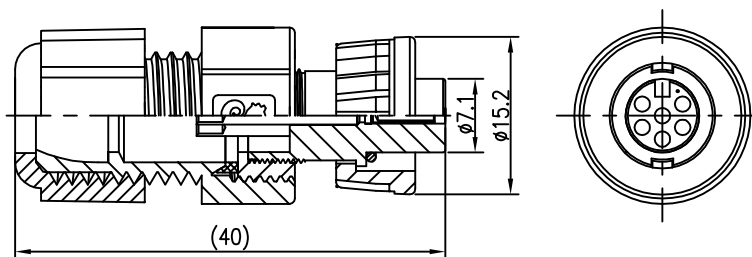


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T090903-5A~5C	Harlen	2009.09.12
B	PDR NO:T091105-4C	HARLEN	2010.01.20

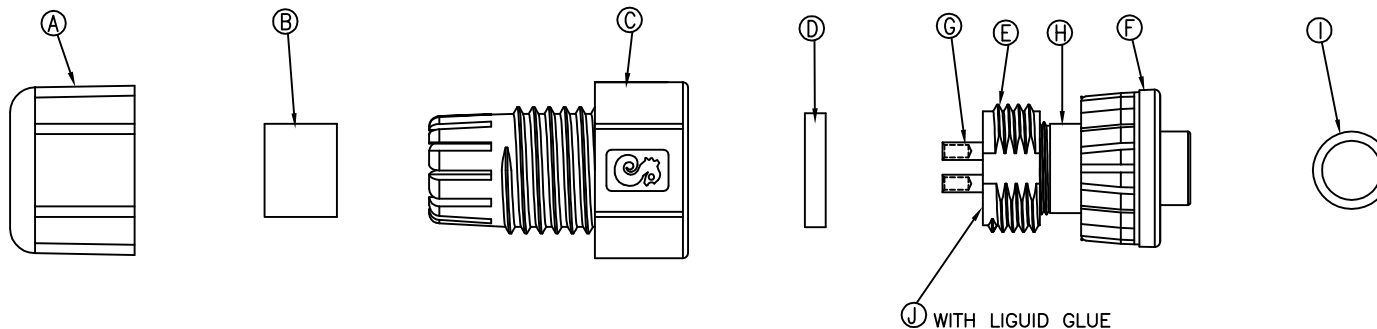

NOTES:

1. WATERPROOF RATE: IP67  
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. SEAL1 FOR CABLE OD:φ4.0mm~φ6.5mm
3. SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS
6. ORDER INFORMATION:  
2CN3032-XOX200

— 2—CURRENT RATING 2A  
— 4~6 - 4~6 PIN

2CN3032-X03200		2A	24AWG~26AWG *4C
2CN3032-X04200		2A	24AWG~26AWG *4C
2CN3032-X05200		2A	24AWG~26AWG *5C
2CN3032-X06200		2A	24AWG~26AWG *6C
P/N:	Pin Assignments Front View	Current Rating	Recommended Cable AWG

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
J	LIQUID GLUE			BLACK
I	O-RING	1	EPDM	BLACK
H	BODY	1	NYLON+GF	BLACK
G	FEMALE PIN	*	Phosphor Bronze	6u" GOLD PLATING OVER NICKEL PLATING
F	LOCK NUT	1	NYLON+GF	BLACK
E	SCREW NUT	1	NYLON+GF	BLACK
D	GASKET	1	SILICONE	BLACK
C	CLAMP RING	1	PPE	BLACK
B	SEAL	1	EPDM	BLACK
A	SEALING NUT	1	PPE	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司				
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR MINI SIZE (IP67)
X.X	:±0.3	X.X	:±1°	FEMALE CONN. FEMALE (3~6)PIN(2A) ASSEMBLY TYPE
X.XX	:±0.2			
DWN	Harlen	PART NO.2CN3032-X0□200		
CHKD	Steve	SCALE 2:1	UNIT: mm	
APVD	Max	SIZE: A3	SHEET:1 OF 1	REV:B
<b>CUSTOMER COPY</b>				