




1 2 3 4 5 6 7 8


F	ECN NO:S120552	HARLEN	2012.5.16	REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO:T101207-3A	Harlen	2010.12.9				
B	ECN NO: S110335	Harlen	2011.03.17				
C	ECN NO: S110502	Harlen	2011.05.05				
D	ECN NO: S110538	Harlen	2011.06.01				
E	ECN NO:S110707	HARLEN	2011.8.2				

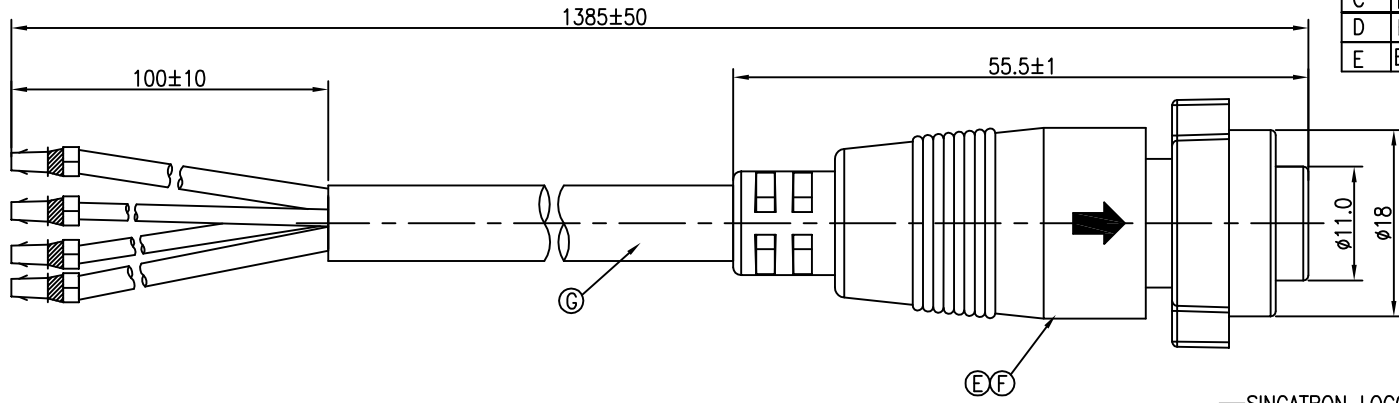

CONN. WATERPROOF RATE: IP55

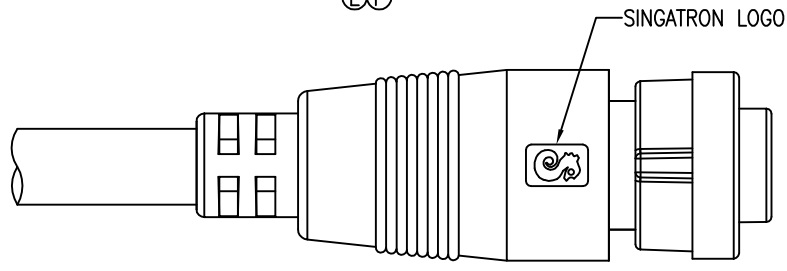

BROWN	4
WHITE(18#)	3
BLUE	2
BLACK(18#)	1
WIRE COLOR	CONN.
PIN OUT	



- NOTES:
1. WATERPROOF RATE: IP55
 2. ELECTRICAL CHARACTERISTICS
TEMPERATURE RANGE: -20°C TO +80°C
CURRENT RATING: 5+10A
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

H	TERMINAL	4	PHOSPHOR BRONZE	TIN PLATING
G	CABLE	1	UL2464 18AWG*2C+ 20#*2C OD7.3 (UV RESISTANT)	BLACK (PVC JACKET)
F	INNER MOLD	1	PVC	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	PA66+30%GF	BLACK
B	MALE PIN	4	BRASS	1u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	PA66+30%GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES			Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司	
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR STANDARD SIZE (IP55) FEMALE CONN. MALE 2+2PIN(5+10A) LOCK TYPE
X.X	:±0.3	X.X	:±1°	DWN Harlen PART NO.2CT3016-X04801
X.XX	:±0.2			CHKD STEVE SCALE 2:1 UNIT: mm
				APVD QUAN SIZE: A3 SHEET:1 OF 1 REV:F
CUSTOMER COPY				

1 2 3 4 5 6 7 8 RD-06-043-A