


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
1	PDR NO:S120925-3B	Harlen	2012.11.1
2	取消UV膠	Harlen	2013.9.27

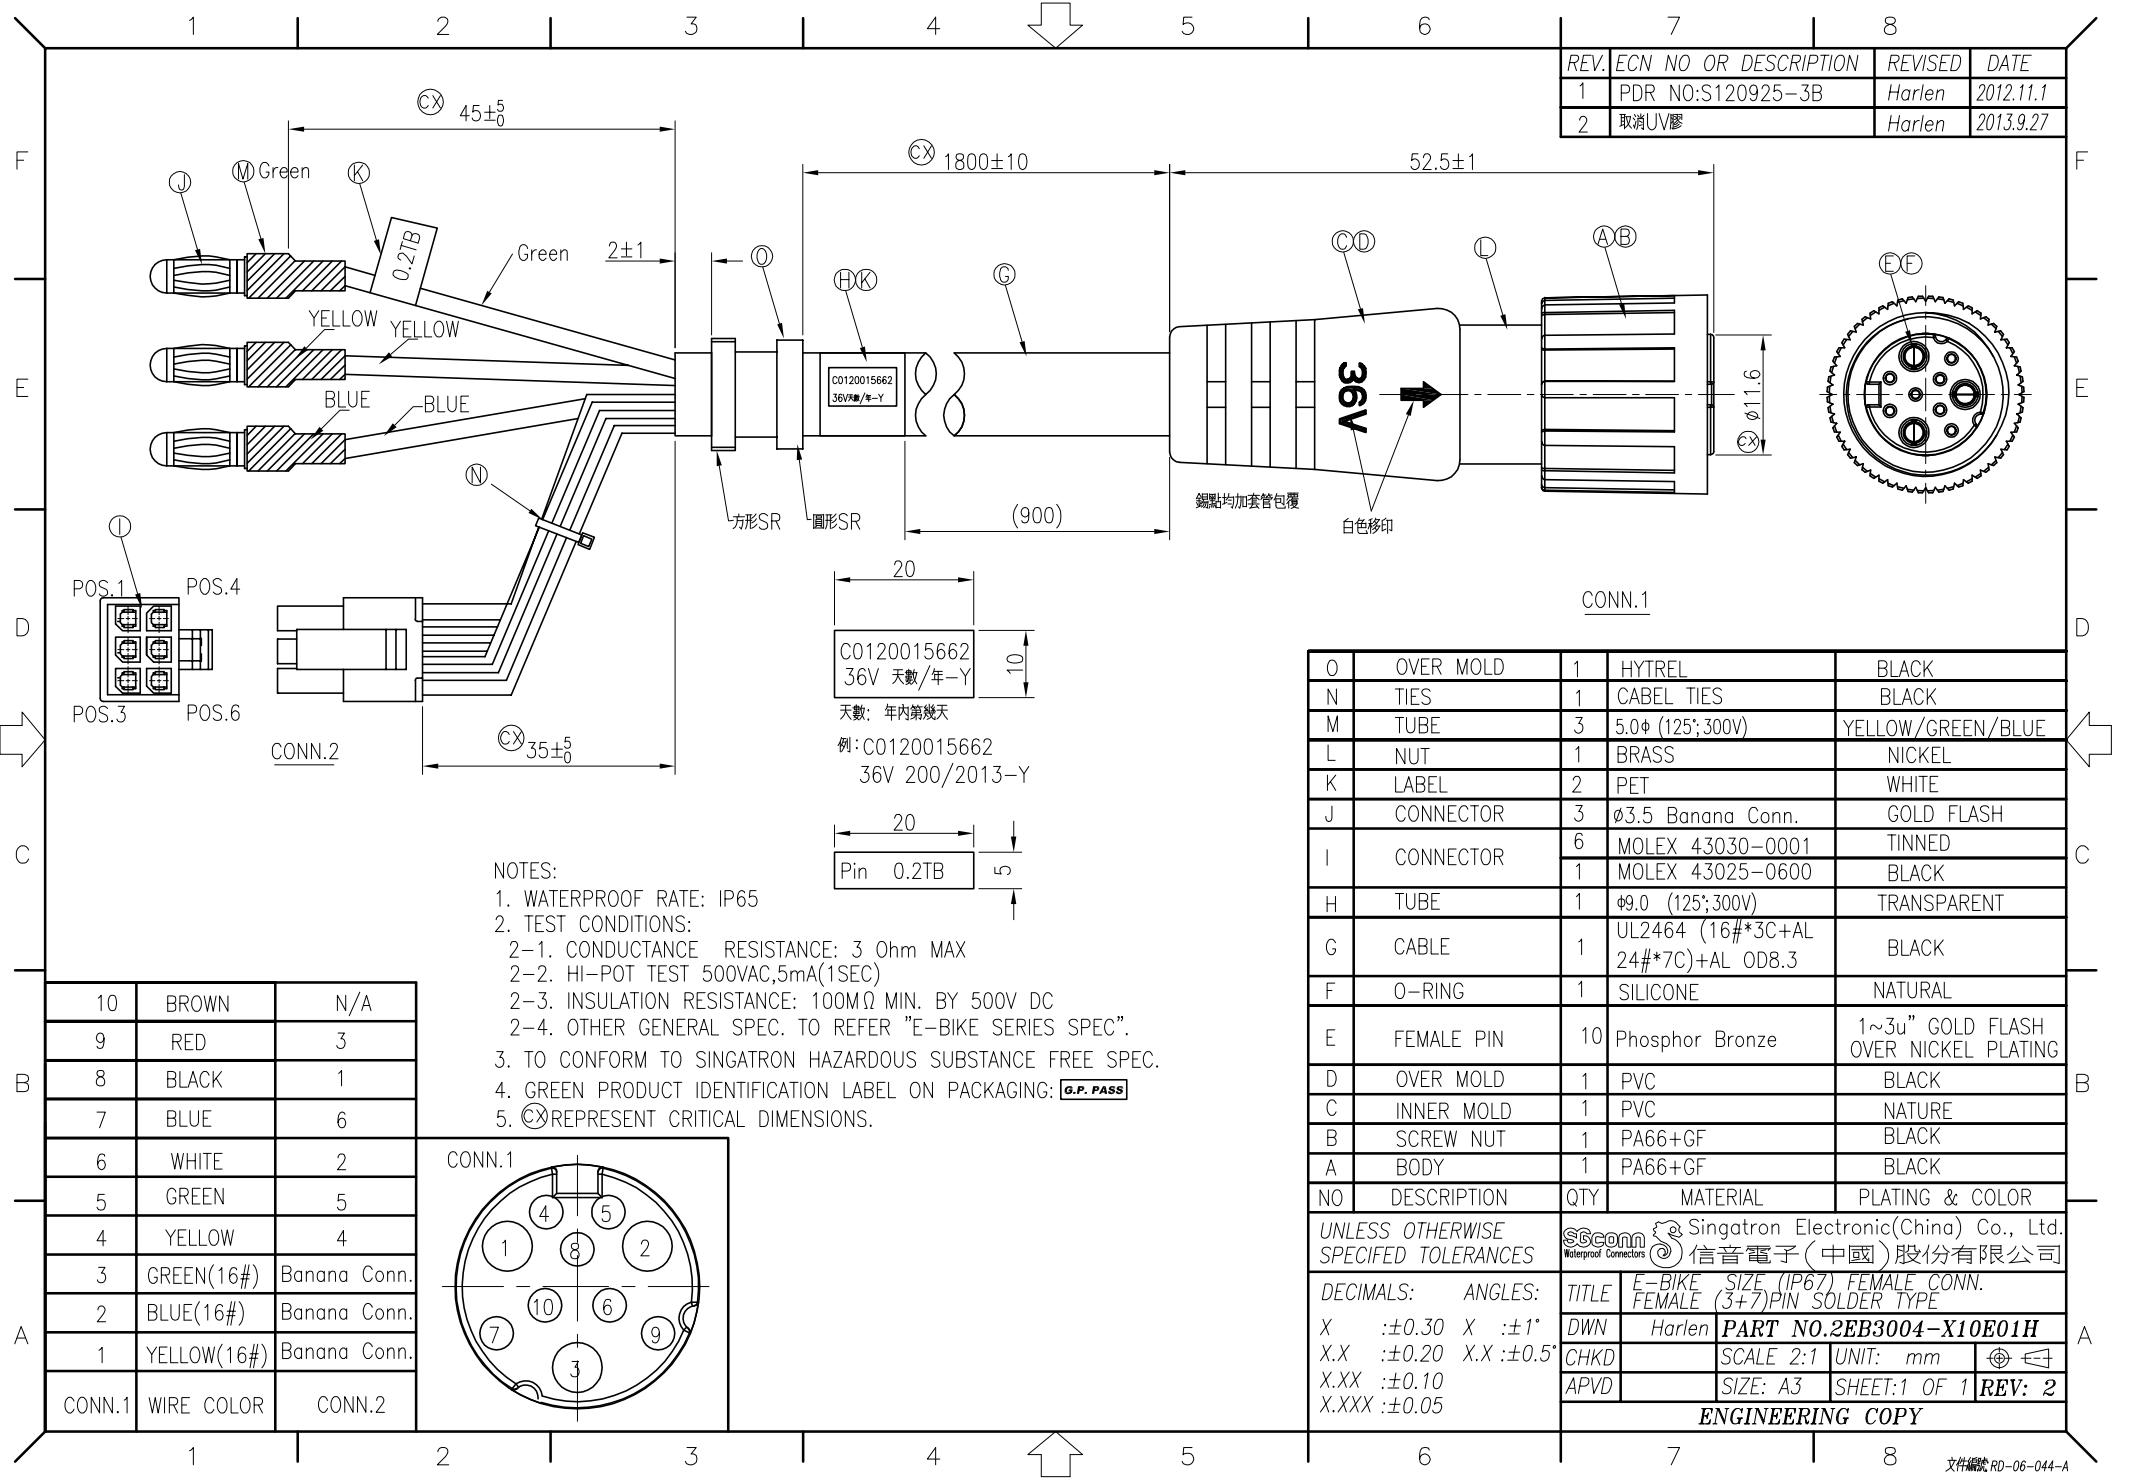


C0120015662
36V 天數/年-Y
天數: 年內第幾天
例: C0120015662
36V 200/2013-Y

20
Pin 0.2TB
5

- NOTES:
1. WATERPROOF RATE: IP65
 2. TEST CONDITIONS:
 - 2-1. CONDUCTANCE RESISTANCE: 3 Ohm MAX
 - 2-2. HI-POT TEST 500VAC,5mA(1SEC)
 - 2-3. INSULATION RESISTANCE: 100MΩ MIN. BY 500V DC
 - 2-4. OTHER GENERAL SPEC. TO REFER "E-BIKE SERIES SPEC".
 3. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 4. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 5. ⊗ REPRESENT CRITICAL DIMENSIONS.

10	BROWN	N/A
9	RED	3
8	BLACK	1
7	BLUE	6
6	WHITE	2
5	GREEN	5
4	YELLOW	4
3	GREEN(16#)	Banana Conn.
2	BLUE(16#)	Banana Conn.
1	YELLOW(16#)	Banana Conn.
CONN.1	WIRE COLOR	CONN.2



CONN.1

QTY	DESCRIPTION	MATERIAL	PLATING & COLOR	
1	OVER MOLD	HYTREL	BLACK	
1	TIES	CABEL TIES	BLACK	
3	TUBE	5.0φ (125;300V)	YELLOW/GREEN/BLUE	
1	NUT	BRASS	NICKEL	
2	LABEL	PET	WHITE	
3	CONNECTOR	φ3.5 Banana Conn.	GOLD FLASH	
6	CONNECTOR	MOLEX 43030-0001	TINNED	
1		MOLEX 43025-0600	BLACK	
1	TUBE	φ9.0 (125;300V)	TRANSPARENT	
1	CABLE	UL2464 (16#*3C+AL 24#*7C)+AL ODB.3	BLACK	
1	O-RING	SILICONE	NATURAL	
10	FEMALE PIN	Phosphor Bronze	1~3u" GOLD FLASH OVER NICKEL PLATING	
1	OVER MOLD	PVC	BLACK	
1	INNER MOLD	PVC	NATURE	
1	SCREW NUT	PA66+GF	BLACK	
1	BODY	PA66+GF	BLACK	
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.30 X :±1°

X.X :±0.20 X.X :±0.5°

X.XX :±0.10

X.XXX :±0.05

Sscconn Singatron Electronic(China) Co., Ltd.
Waterproof Connectors 信音電子(中國)股份有限公司

TITLE: E-BIKE SIZE (IP67) FEMALE CONN.
FEMALE (3+7)PIN SOLDER TYPE

DWN: Harlen PART NO.2EB3004-X10E01H

CHKD: SCALE 2:1 UNIT: mm

APVD: SIZE: A3 SHEET:1 OF 1 REV: 2

ENGINEERING COPY