
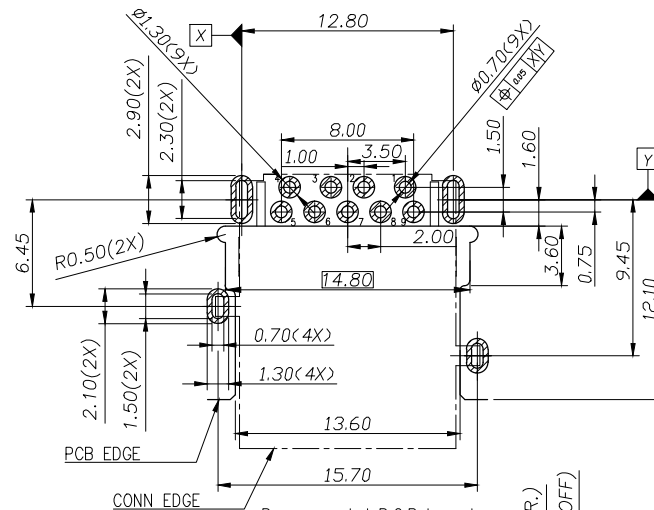


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO :T170928-4A	ERIC	2018.04.18
B	ECN NO:S180819-C	Charles	2018.12.21


SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. CURRENT RATING: 1.8A (PIN1,4) ; OTHER CONTACTS 0.25A
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR 1 MINUTE
- 1-4. INSULATION RESISTANCE: 100MΩ MIN
2. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
3. HALOGEN PRODUCT IDENTIFICATION MARK ON JACK: 
4. HALOGEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: 
5. FOR WAVE SOLDERING LEAD-FREE PROCESS.
6. DATE : YYMMDD
7. PACKAGING : TAPE & REEL.
8. ▽ REPRESENT CPK DIMENSIONS.

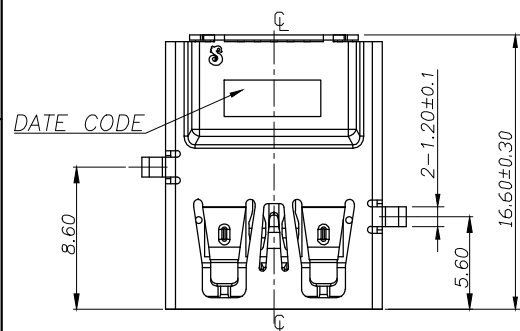


3D VIEW



HOUSING 曲線式結構之模造結構





1.30(SHELL&TIER.)

0.69(STAND OFF)



Pin Number	Signal ASSIGNMENT
PIN 1	VBUS
PIN 2	D-
PIN 3	D+
PIN 4	GND
PIN 5	StdA_SSRX-
PIN 6	StdA_SSRX+
PIN 7	GND_DRAIN
PIN 8	StdA_SSTX-
PIN 9	StdA_SSTX+

Section:A-A
Scale:1:1

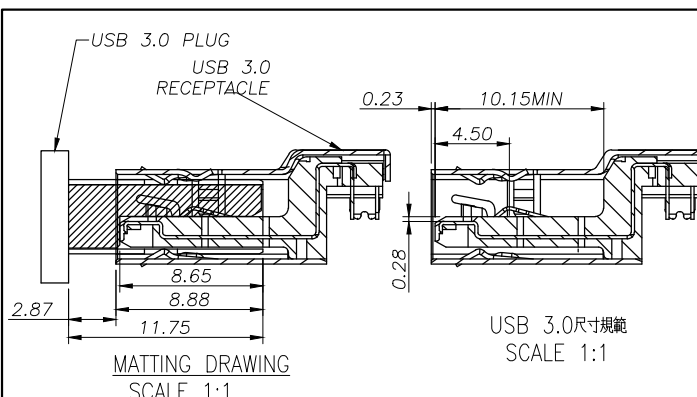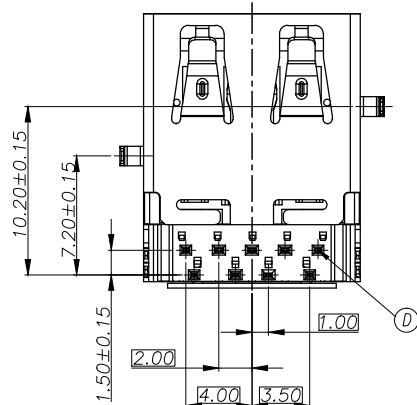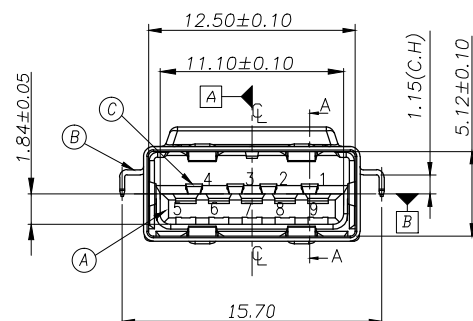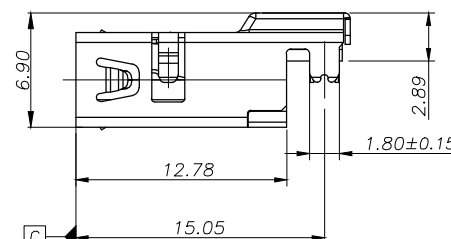

MATING DRAWING
SCALE 1:1

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	TERMINAL	5	C5210	GOLD FLASH PLATED ON MATING AREA, Matt. Sn 100u"Min. PLATED ON SOLDERING 60u" NICKEL UNDER PLATING OVERALL
C	TERMINAL	4	C5210	
B	SHELL	1	SUS430	NICKEL 60u"MIN
A	HOUSING	1	PA9T	BLACK

UNLESS OTHERWISE SPECIFIED TOLERANCES		 Singatron Enterprise Co., Ltd. 信音企業股份有限公司	
DECIMALS:	ANGLES:	TITLE	USB 3.0 REVERSE CONNECTOR
X :±0.5	X :±2°	DWN	Charles
X.X :±0.3	X.X :±1°	CHKD	James
X.XX :±0.2		APVD	Boye
		SCALE	1:1
		UNIT	mm
		SIZE	A3
		SHEET	1 OF 1
		REV	B
CUSTOMER COPY			