


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T080815C4C	Steve	2009.04.28

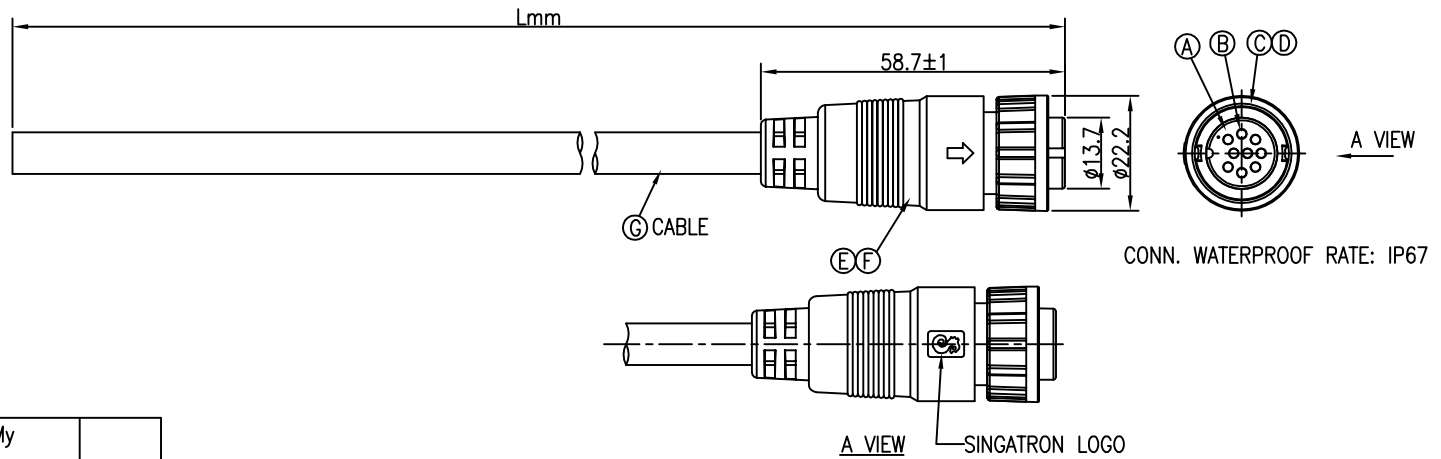

D	2CM3004-X03600		UL2464 16AWG*3C+Al/My (UV Resistant),OD=φ7.0, Wire Color: 1.Brown 2.Blue 3.Black	16A
C	2CM3004-X07300		UL2464 24AWG*7C+Al/My (UV Resistant),OD=φ5.0, Wire Color: 1.Blue 2.Black 3.Yellow 4.Red 5.Brown 6.Green 7.White	5A
B	2CM3004-X08300		UL2464 24AWG*8C+Al/My (UV Resistant),OD=φ5.4, Wire Color: 1.Black 2.Brown 3.White 4.Blue 5.Red 6.Grey 7.Yellow 8.Green	5A
A	2CM3004-X09300		UL2464 24AWG*8C+Al/My (UV Resistant),OD=φ5.4, Wire Color: 1.Brown 2.Blue 3.White 4.Green 5.Yellow 6.Grey 7.Pink 8.Red 9.Black	5A
	P/N:	Pin Assignments Front View	Cable Spec.	Current Rating

- NOTES:
- WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
 - CABLE LENGTH TOLERANCE: 1M~10M±5%mm,
11M~99M±500mm.
CABLE JACKET MATERIAL: BLACK PVC
 - SPECIFICATIONS:SEE "CIRCULAR SERIES SPECIFICATIONS".
 - TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
 - GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
 - ORDER INFORMATION:
2CM3004-XXXX00

- 3-CURRENT RATING 5A
- 6-CURRENT RATING 16A
- 03- 3 PIN
- 07- 7 PIN
- 08- 8 PIN
- 09- 9 PIN

F	INNER MOLD	1	TPU	NATURAL
E	OVER MOLD	1	PVC	BLACK
D	O-RING	1	EPDM	BLACK
C	LOCK NUT	1	NYLON+GF	BLACK
B	FEMALE PIN	*	Phosphor Bronze Alloy	6u" GOLD PLATED OVER NICKEL PLATING
A	BODY	1	NYLON+GF	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司		
DECIMALS:		ANGLES:		TITLE
X	:±0.5	X	:±2°	CIRCULAR MIDDLE SIZE (IP67) FEMALE CONN. FEMALE (3~9) PIN LOCK TYPE
X.X	:±0.3	X.X	:±1°	DWN Steve PART NO.2CM3004-XXXX00
X.XX	:±0.2	CHKD	Quan	SCALE 1:1 UNIT: mm
		APVD	Max	SIZE: A3 SHEET:1 OF 1 REV: A
CUSTOMER COPY				