



PANEL NUT




螺牙內增加耐落處理 (整圈塗布)
耐落膠規格: T-40 COLOR:BLUE


SPRING WASHER



Conn.




PIN ASSIGNMENTS
FRONT VIEW




RECOMMENDED PANEL
CUT-OUT

HOUSING



PIN ASSIGNMENTS
FRONT VIEW

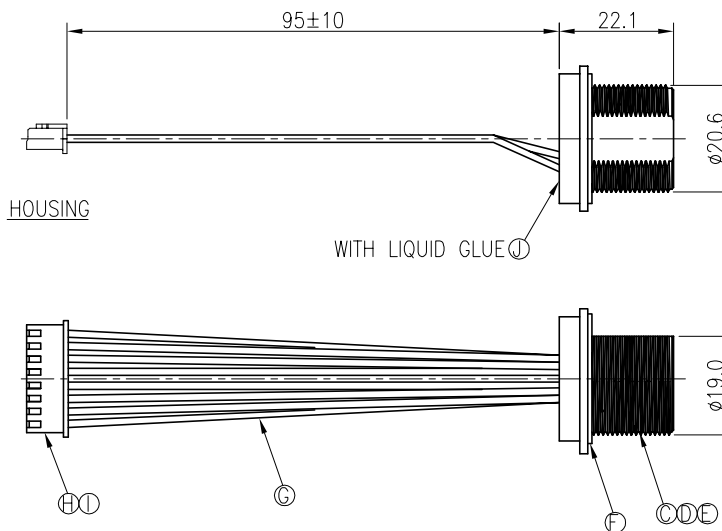


NOTES:

1. WATERPROOF RATE: IP67
IP67: IMMERSED IN 1M WATER FOR 30 MINUTES
2. ELECTRICAL CHARACTERISTICS:
2-1. RATING:125V 1.5A
2-2. CONTACT RESISTANCE: 3Ω MAX.(INITIAL)
2-3. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE
2-4. INSULATION RESISTANCE: 30MΩ MIN. MEASURED BY 300 VDC
3. OTHER GENERAL SPEC. TO REFER "RJ45 SERIES SPEC".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: **G.P. PASS**
6. FOR PANEL THICKNESS MAX OF 4.3mm

1	GRAY	8
2	BLACK	7
3	GRAY	6
5	BLACK	5
6	GRAY	4
4	BLACK	3
7	GRAY	2
8	BLACK	1
HOUSING	WIRE COLOR	CONN.

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:T130724-2A	Susie	2013.10.15



Conn.
WATERPROOF RATE: IP67

J	GLUE	1	SILICON	BLACK
I	TERMINAL	8	P/N:TU3001TPO-A	TIN-PLATED
H	HOUSING	1	P/N:TU3001HNO-08	WHITE
G	WIRE	8	UL1007 24AWG	BLACK/GRAY
F	GASKET	1	EPDM	BLACK
E	CAT.5e	1	N/A	30u"GOLD PLATED
D	SCREW	1	STAINLESS STEEL	N/A
C	BODY	1	ZINC ALLOY	120u"NICKEL PLATED
B	SPRING WASHER	1	SUS304	N/A
A	PANEL NUT	1	ZINC ALLOY	120u"NICKEL PLATED
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.5 X :±2°
X.X :±0.3 X.X :±1°
X.XX :±0.2

Singatron Electronic(China) Co., Ltd.
信音電子(中國)股份有限公司

TITLE	RJ45 KEYSTONE JACK SOCKET
DWN	Susie PART NO.2TJ3003-X05129H
CHKD	JF SCALE 1:1 UNIT: mm
APVD	Quan SIZE: A3 SHEET:1 OF 1 REV:A

CUSTOMER COPY