




REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	Vicky	2014.07.18

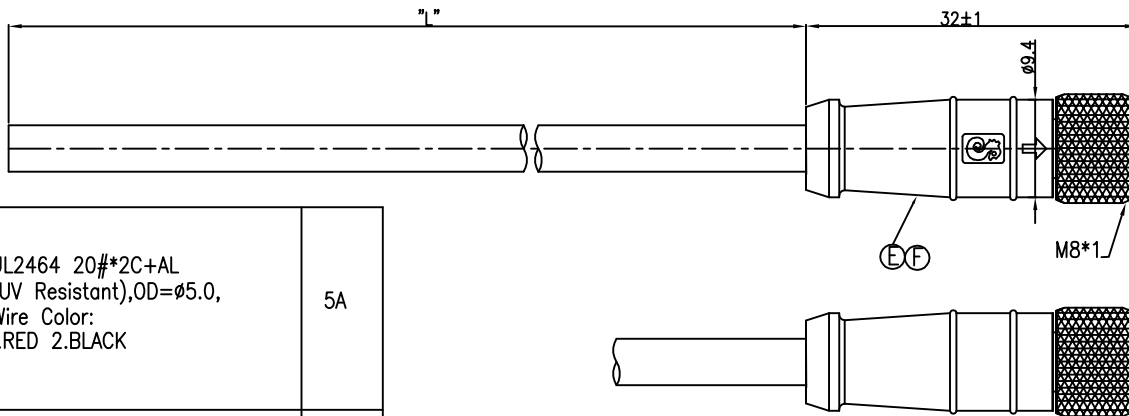

FEMALE CONN.
WATERPROOF RATE: IP67



A VIEW

NOTES:

1. WATERPROOF RATE: IP67
2. CABLE LENGTH TOLERANCE: 1M~10M±5%mm, 11M~99M±500mm.
CABLE JACKET MATERIAL: BLACK PVC
3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

F	2ME3010-X02300		UL2464 20#*2C+AL (UV Resistant),OD=ø5.0, Wire Color: 1.RED 2.BLACK	5A
E	2ME3010-X03300		UL2464 24AWG*7C+Al/My (UV Resistant),OD=ø5.0, 1.BROWN 2.BLUE 3.BLACK	5A
D	2ME3010-X04200		UL2464 22#*4C+AL (UV Resistant),OD=ø5.0, Wire Color: 1.BLACK 2.BROWN 3.RED 4.ORANGE	2A
C	2ME3010-X05200		UL2464 24#*5C+AL (UV Resistant),OD=ø6.0, Wire Color: 1.YELLOW 2.GREEN 3.BLUE 4.WHITE 5.PINK	2A
B	2ME3010-X06200		UL2464 28#*6C+AL (UV Resistant),OD=ø4.6 Wire Color: 1.BLACK 2.BROWN 3.RED 4.ORANGE 5.YELLOW 6.GREEN	2A
A	P/N:	Pin Assignments Front View	Cable Spec.	Current Rating

F	OVER MOLD	1	TPU	BLACK
E	UV GLUE	1	N/A	NATURAL
D	O-RING	1	VITON	RED
C	LOCK NUT	1	C3604	NICKEL PLATING
B	FEMALE PIN	*	COPPER ALLOY	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

Singatronic Electronic(China) Co., Ltd.
 信音電子(中國)股份有限公司

DECIMALS:	ANGLES:	TITLE	M8 SERIES SPECIFICATIONS(IP67) FEMALE CONN. FEMALE (2~6) PIN LOCK TYPE	
X :±0.5	X :±2°	DWN	Vicky	PART NO.2ME3010-X0XXXX
X.X :±0.3	X.X :±1°	CHKD	Harlen	SCALE 1:1 UNIT: mm
X.XX :±0.2		APVD	Quan	SIZE: A3 SHEET:1 OF 1 REV: A

CUSTOMER COPY