
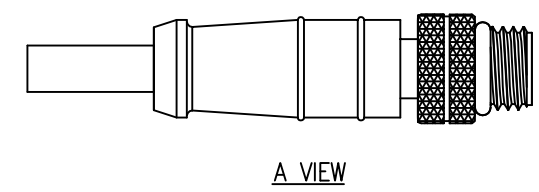



REV.	ECN NO OR DESCRIPTION	REVISED	DATE
A	PDR NO.:	Vicky	2014.07.18

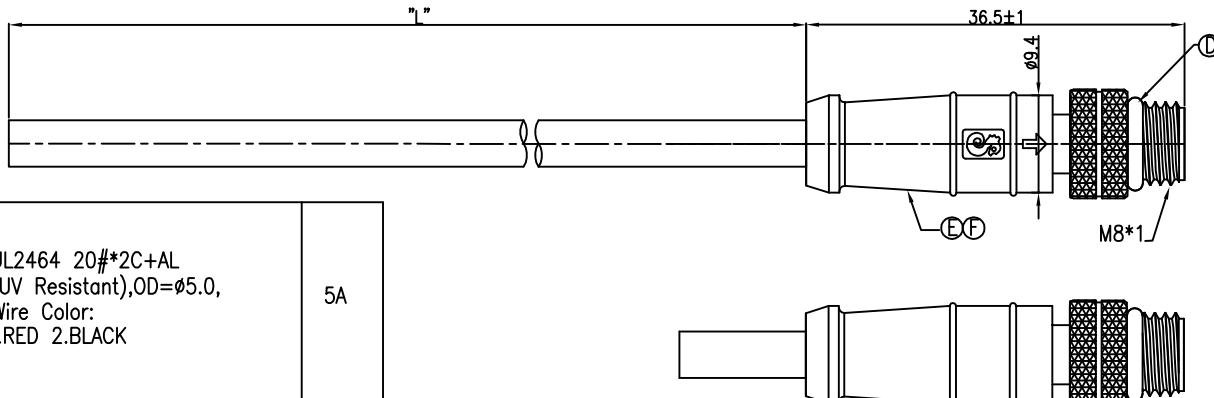

E	2ME3012-X02306H		UL2464 20#*2C+AL (UV Resistant),OD=Ø5.0, Wire Color: 1.RED 2.BLACK	5A
D	2ME3012-X03300		UL2464 24AWG*7C+Al/My (UV Resistant),OD=Ø5.0, Wire Color: 1.BROWN 2.BLUE 3.BLACK	5A
C	2ME3012-X04201H		UL2464 22#*4C+AL (UV Resistant),OD=Ø5.0, Wire Color: 1.BLACK 2.BROWN 3.RED 4.ORANGE	2A
B	2ME3012-X05200		UL2464 24#*5C+AL (UV Resistant),OD=Ø6.0, Wire Color: 1.YELLOW 2.GREEN 3.BLUE 4.WHITE 5.PINK	2A
A	2ME3012-X06205H		UL2464 28#*6C+AL (UV Resistant),OD=Ø4.6 Wire Color: 1.BLACK 2.BROWN 3.RED 4.ORANGE 5.YELLOW 6.GREEN	2A
	P/N:	Pin Assignments Front View	Cable Spec.	Current Rating

- NOTES:
1. WATERPROOF RATE: IP67
  2. CABLE LENGTH TOLERANCE: 1M~10M±5%mm, 11M~99M±500mm.  
CABLE JACKET MATERIAL: BLACK PVC
  3. SPECIFICATIONS:SEE "M8 SERIES SPECIFICATIONS".
  4. TO CONFORM TO SINGATRON HAZARDOUS SUBSTANCE FREE SPEC.
  5. GREEN PRODUCT IDENTIFICATION LABEL ON PACKAGING: G.P. PASS

F	OVER MOLD	1	TPU	BLACK
E	UV GLUE	1	N/A	NATURAL
D	O-RING	1	VITON	BLACK
C	NUT	1	C3604	NICKEL PLATING
B	MALE PIN	*	BRASS	6u" GOLD PLATING OVER NICKEL PLATING
A	BODY	1	TPU	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES		Singatron Electronic(China) Co., Ltd. 信音電子(中國)股份有限公司		
DECIMALS: X :±0.5 X.X :±0.3 X.XX :±0.2		TITILE M8 SERIES SPECIFICATIONS(IP67) MALE CONN. MALE (2~6) PIN LOCK TYPE DWN Vicky PART NO.2ME3012-X0XXXX CHKD Harlen SCALE 1:1 UNIT: mm APVD Quan SIZE: A3 SHEET:1 OF 1 REV: A		
		<b>CUSTOMER COPY</b>		